


15-065-02200-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

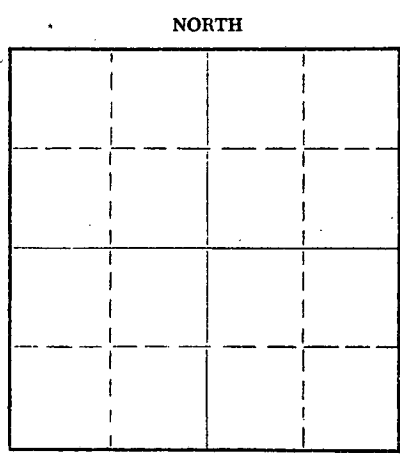

Locate well correctly on above  
Section Plat

Graham County. Sec 6 Twp. 9S Rge. 23W(B) (W)  
Location as "NE/CNW&SW" or footage from lines SW 1/4 SE 1/4 NE 1/4  
Lease Owner Kamac Oil and Gas Corporation  
Lease Name Staggers Well No. 1  
Office Address 533 Petroleum Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 4-27-58 19\_\_  
Application for plugging filed 4-27-58 19\_\_  
Application for plugging approved 4-27-58 19\_\_  
Plugging commenced 4-27-58 19\_\_  
Plugging completed 4-27-58 19\_\_  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3910' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	216'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st Plug @ 500' w/ 25 sacks cement.  
2nd plug @ 200' w/ 15 sacks cement.  
Top plug @ 40' w/ 10 sacks cement.

RECEIVED  
MAY 7 1958  
CONSERVATION DIVISION  
Wichita, Kansas


5-7-58

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Leben Drilling, Inc.  
Address 905 Central Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Frank Hamlin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Frank Hamlin  
905 Central Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 30th day of April, 19 58  
My commission expires June 17, 1961



Ruth N. Benjamin  
Ruth N. Benjamin  
Notary Public.

PLUGGING  
FILE SEC 6 T 9 R 23W  
BOOK PAGE 91 LINE 27

15-065-02200-0000

DRILLER'S LOG

COMPANY: KAMAC OIL AND GAS CORPORATION  
 CONTRACTOR: LEBEN DRILLING, INC.  
 FARM: STAGGERS #1  
 LOCATION: SW $\frac{1}{4}$  SE $\frac{1}{4}$  NE $\frac{1}{4}$  Sec. 6-9S-23W  
 Graham County, Kansas  
 COMMENCED: 4-16-58  
 COMPLETED: 4-27-58

0	80	Shale
80	216	Blue Shale
216	550	Shale
550	920	Shale & Shells
920	1540	Sand & Shale
1540	1725	Sand
1725	1976	Red Bed
1976	2018	Anhydrite
2018	2350	Shale & Shells
2350	3210	Line & Shale
3210	3640	Line & Shale
3640	3720	Line & Shale
3720	3735	Line
3735	3910	Shale & Line
	3910	<u>Rotary Total Depth - D. &amp; A.</u>

Set 216' of 8 5/8" surface casing with 165 sacks cement with 3 sacks CaCl.

I, Frank Hamlin, do hereby certify that the above and foregoing is a true and correct copy of the log of the Staggers #1, located SW $\frac{1}{4}$  SE $\frac{1}{4}$  NE $\frac{1}{4}$  of Section 6, Township 9 South, Range 23 West, Graham County, Kansas, as reflected by the files of Leben Drilling, Inc.

LEBEN DRILLING, INC.

BY: Frank Hamlin

STATE OF KANSAS )  
COUNTY OF SEDGWICK ) SS

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 30th day of April, 1958.

Ruth N. Benjamin  
Ruth N. Benjamin, Notary Public

My Commission Expires:  
June 17, 1961.

5-7-58

PLUGGING  
 FILE SEC 6 T 9 R 23W  
 BOOK PAGE 97 LINE 27