


15-065-30014-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

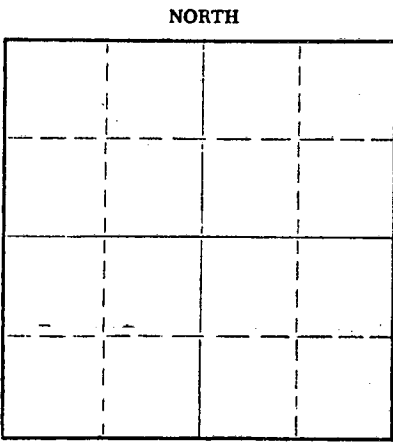

Graham County, Sec. 12 Twp. 9S Rge. (E) 23 (W)
Location as "NE/CNW&SW" or footage from lines C NE SW
Lease Owner Chief Drilling Co., Inc.
Lease Name MILDEXTER Well No. 1
Office Address Box 797 - Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2/5 19 65
Application for plugging filed 2/5 19 65
Application for plugging approved 2/5 19 65
Plugging commenced 2/5 19 65
Plugging completed 2/5 19 65
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols - Moreland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3890 Feet
Show depth and thickness of all water, oil and gas formations. ?

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	187	8-5/8"	187	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Wooden plug set @ 540'
Mixed 20 sacks cement through drill pipe
Hulls and wooden plug set @ 180'
Mixed 20 sacks cement through drill pipe
1/3 sack hulls and wooden plug set @ 40'
Mixed 10 sacks cement through drill pipe

RECEIVED
STATE CORPORATION COMMISSION

FEB 10 1965

CONSERVATION DIVISION
Wichita, Kansas

2-10-65

Name of Plugging Contractor Chief Drilling Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address Box 797 - Great Bend, Kansas


STATE OF KANSAS, COUNTY OF BARTON, ss.
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. CHIEF DRILLING CO., INC.

(Signature) V. Richard Hoover
Box 797 - Great Bend, Kansas
(Address)

SUBSCRIBED AND Sworn to before me this 5th day of February, 19 65

My commission expires Jan. 26, 1967
Carmen R. Cook
Carmen R. Cook, Notary Public.



15-065-30014-00-00

WELL LOG

Chief Drilling Co., Inc.
Box 797
Great Bend, Kansas

MILDEXTER #1
C NE SW Sec. 12-9S-23W
Graham County, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 1/30/65
Completed: 2/5/65

Casing Record: 8-5/8" @ 187' w/150 sacks Sunset Cement & 2 sacks Gel.

DRY & ABANDONED

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Sand & Shale	0	200	2388 Gr.
Shale & Shells	200	1245	2390 D.F.
Shale & Sand	1245	1850	2393 K.B.
Shale	1850	2003	
Anhydrite	2003	2038	
Shale	2038	2655	
Lime & Shale	2655	2750	
Shale	2750	2835	
Lime & Shale	2835	3696	
Lime	3696	3890	
Total Depth	3890		

<u>FORMATION TOPS</u>	
Anhydrite	2003 + 390
Heebner	3660 -1207
Toronto	3684 -1291
Lansing	3696 -1303
Total Depth	3890 -1497

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C NE SW Sec. 12-9S-23W, Graham County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
V. Richard Hoover, President

Subscribed and sworn to before me this 5th day of February, 1965.

Carmen R. Cook
Carmen R. Cook, Notary Public

My commission expires: Jan. 26, 1967.



RECEIVED
STATE CORPORATION COMMISSION

FEB 10 1965
2-10-65
CONSERVATION DIVISION
Wichita, Kansas