


15-163-03118-00-00

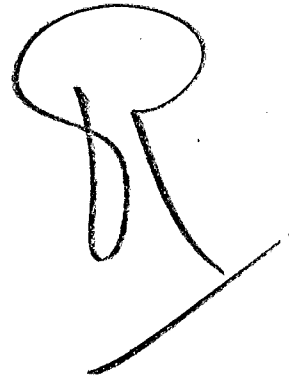

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 93-5

LOCATION NW NW NE

SEC. 6 TWP. 9 RGE. 17

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Garvert

Operator V.D. Sidey Oil Co Address Russell, Kans

Field _____ County Rooks

Total Depth 3417 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 103' circulated with cement - 5 1/2" at 3413' with
100 sax cement behind.

Filled with chat to 3410' set 4 sax cement with dump bailer
pulled 2860' 5 1/2", mud to surface with 15 sax Aquagel,
pumped cementing plug to 160', followed by 50 sax cement,
filling hole with cement 160' to 0'

Mudding and Cementing by Halliburton Co.

Edmond Perry
District Conservation Agent

Date 4-30-53

RECEIVED
STATE CORPORATION COMMISSION
MAY - 5 1953
CONSERVATION DIVISION
Wichita, Kansas

5/5/53

PLUGGING
FILE SEC 6 T 9 R 17W
BOOK PAGE 23 LINE 5