


DISTRICT CONSERVATION AGENT'S REPORT

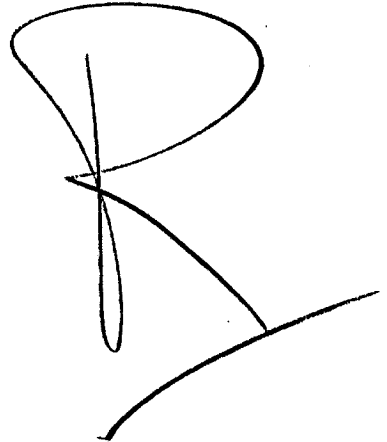

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NE SE NW

SEC. 11 TWP. 9 RGE. 17

Dry Hole x Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. B-1 | Lease Westhusin ^{KCC} B ^{ZAP}

Operator Harbar Drg Co Address Wichita, Kans

Field Westhusin County Rooks

Total Depth 3416 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 100' circulated with cement - 5 1/2" at 3412' with
100 sax cement behind.

Lane-wells plugs to 3246', top perforations at 3219' -

Filled with mud and chat to 3210', run 4 sax cement with
dump bailer, pulled 2390' 5 1/2", mudded hole to 100', set bridge
and run cement from 100' to bottom cellar.

PLUGGING
FILE SEC 11 T 9 R 17
BOOK PAGE 4 LINE 27

Edna Betty
MAY 6 - 1950 5-6-1950
STATE CORPORATION
District Conservation Agent
KANSAS
Date 5-4-50

