

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County Sec. 23 Twp. 9S Rge. 20 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE SW

Lease Owner W. B. Pardoe

Lease Name Steeples Well No. 1

Office Address 232 Greenwich Road, N. E., Grand Rapids, Michigan

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 10-18 19 51

Application for plugging filed 10-17 19 51

Application for plugging approved 10-17 19 51


Plugging commenced 12:30 a.m., 10-18 19 51

Plugging completed 1:30 a.m., 10-18 19 51

Reason for abandonment of well or producing formation Commercial quantity of oil not found.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

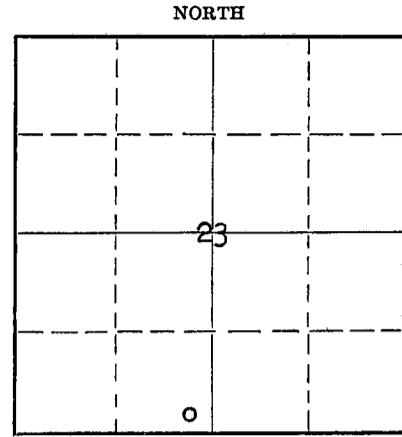

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3830 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	202	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud. Set wooden plug at 190'. Pumped in 15 sacks of cement on top of plug. Filled balance of hole with heavy mud and capped with 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to K. & E. Drilling, Inc.
Address 1006 Central Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Clinton Engstrand, (President) agent for (Employee of owner) or (Owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clinton Engstrand
1006 Central Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of October, 19 51.
My commission expires 6-5-54



Eldon Petty
Notary Public.

PLUGGING
FILE SEC 23 T 9 R 20W
BOOK PAGE 17 LINE 18

RECEIVED
STATE CORPORATION COMMISSION
OCT 24 1951
Wichita, Kansas

15-163-00381-00-00

W. B. PARDOE

STEEPLES # 1

SE SE SW Sec. 23-9S-20W
Rooks County, Kansas

Comm: 10-5-51

Comp: 10-18-51

Total Depth: 3830'

Casing

8 5/8" Set @ 202'
5 1/2" - None

Cement

150 Sacks
None

FORMATION

DEPTH

Sand	0 - 40
Sand	40 - 90
Shale shells	90 - 204
Lime	204 - 220
Shale & sand	220 - 400
Shale & shells	400 - 1530
Shale & broken lime	1530 - 1750
Shale & lime shells	1750 - 2030
Shale & lime	2030 - 2195
Shale & broken lime	2195 - 2340
Shale & lime shells	2340 - 2405
Shale & lime	2405 - 2550
Lime	2550 - 2590
Shale shells	2590 - 2760
Shale & lime	2760 - 2805
Shale & lime shells	2805 - 2900
Shale & lime	2900 - 3059
Shale & lime shells	3059 - 3115
Shale & lime	3115 - 3425
Lime	3425 - 3482
Lime (hard)	3482 - 3518
Lime & chert	3518 - 3545
Lime	3545 - 3640
Shale & lime	3640 - 3765
Cherty lime	3765 - 3776
Conglomerate	3776 - 3802
Arbuckle	3802 - 3820
Lime	3820 - 3830

STATE OF KANSAS)
) SS
SEDGWICK COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

[Handwritten Signature]

Subscribed and sworn to before me this 22nd day of October, 1951.

[Handwritten Signature]
Notary Public

My commission expires: 6-5-54



PLUGGING
FILE SEC 23 T 9 R 20W
BOOK PAGE 117 LINE 12

OCT 24 1951
REGISTRATION DIVISION
Wichita, Kansas