

15-163-19244-00-01

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 124-3

LOCATION CW $\frac{1}{2}$ SW NE

SEC. 12 TWP. 9 RGE. 17

Dry Hole Abandoned Oil Well X Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 1 Lease Hrabe

Operator Plain Stock Oil Co Address Wichita,

Field Westhusin County Rooks


Total Depth 3435 Feet.

(Describe briefly the manner in which the well was plugged)

10" at 108' circulated with cement - 7" at 3154' 150 sax behind -
4" liner from 2960 to 3435' cemented in - cement drilled out
to 3412' - Run 2 sax cement at 3412' with dump bailer - filled with
sand to 2960', run 3 sax cement at 2960' with dump bailer - shot off
7" at 2450', circulated with oil, took 1500 Llbs to break around
casing - Shot off and pulled 700 feet of 7" and mudded hole with
heavy mud to 180' set rock bridge and 20 sax cement - filled with
heavy mud to 30', set rock bridge and 10 sax cement to bottom cellar

District Conservation Agent

Date 11-22-49

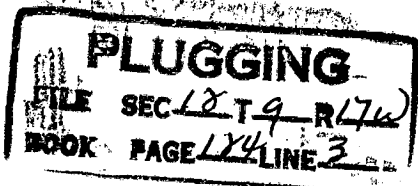

Edna Leary

11/26/49