


15-065-30307-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County. Sec. 24 Twp. 9S Rge. 21 (E) W (W)
Location as "NE/CNW/SW" or footage from lines. NE SE NW
Lease Owner C-G Drilling Co.
Lease Name Balthazor Well No. 1
Office Address 107 Rule Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed August 23 19 65
Application for plugging filed August 23 19 65
Application for plugging approved August 23 19 65
Plugging commenced August 23 19 65
Plugging completed August 23 19 65
Reason for abandonment of well or producing formation Too low structurally

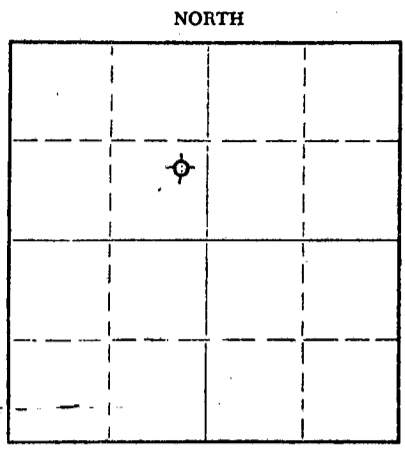

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	174'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Filled with heavy mud to 550'. Set plug with 20 sacks cement. Filled with heavy mud to 175'. Set plug with 20 sacks cement and 1/2 sack hulls. Filled with heavy mud to 40'. Set plug. Filled to top with 12 sacks cement and 1/2 sack hulls.

RECEIVED
STATE CORPORATION COMMISSION
SEP 2 1965
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C-G Drilling Co.
Address 107 Rule Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
G. F. Galloway (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) G. F. Galloway
107 Rule Building, Wichita, Kansas
(Address)



Subscribed and sworn to before me this 25 day of August, 19 65
Vicky Jacobs
Notary Public.

15-065-30307-00-00

WELL LOG

OPERATOR: C-G DRILLING CO.

WELL NAME: BALTHAZOR #1 LOCATION: NE SE NW 24-9S-21W

COUNTY: GRAHAM STATE: KANSAS

WELL COMMENCED: 8/16/65 WELL COMPLETED: 8/23/65

ELEVATION: 2207 K.B. TOTAL DEPTH: 3450

PRODUCTION: Dry & abandoned RIG NO: 1

CASING - 8-5/8": 174.77' (5 its.) with 135 sacks cement

5-1/2": _____

All Measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	174	Sand		
174	1440	Shale-Sand	1500' - 1-1/4°	
1440	1712	Red Shale		
1712	1751	Anhydrite		
1751	1915	Shale		
1915	2230	Shale-Shells		
2230	3450	Lime-Shale	2500' - 1/2° 3000' - 1/2°	

RECEIVED
STATE CORPORATION COMMISSION

SEP 2 1965

9-2-65
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS
COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By [Signature]



SUBSCRIBED AND SWORN TO, BEFORE ME, This 24th day of August, 1965.

Vicky Jacobs
Vicky Jacobs - Notary Public