


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

ROOKS County, Sec. 24 Twp. 10S Rge. 19 (E) (W)

Location as "NE/CNW/SW" or footage from lines APP. NE, NW
Lease Owner PETROLEUM, INC.,
Lease Name VOHS Well No. 1
Office Address R.R. #2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed APRIL 17 19 67
Application for plugging filed APRIL 17 19 67
Application for plugging approved APRIL 17 19 67
Plugging commenced APRIL 17 19 67
Plugging completed APRIL 17 19 67
Reason for abandonment of well or producing formation NO PRODUCIBLE ZONE

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production NONE 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3265' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	209	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

MUD TO 540', FOLLOWED BY WOODEN PLUG, PLACED 25 SACKS CEMENT ON TOP OF PLUG.
MUD TO 200', 1/4 SACK HULLS, WOODEN PLUG, 20 SACKS CEMENT ON TOP OF PLUG,
MUD TO 40', WOODEN PLUG, PLACED 8 SACKS CEMENT ON TOP OF PLUG TO BASE OF WELL
CELLAR.

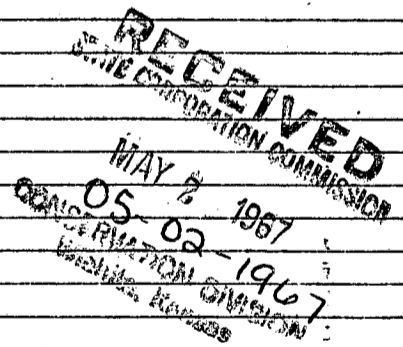

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GARVEY DRILLING CO.
Address R.R. #2, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
MONTE CHADD (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. MONTE CHADD, DIST. PROD. SUPT.

(Signature) Monte Chadd
R.R. #2, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 27 day of APRIL, 19 67

My commission expires

MAY 28, 1969

Richard H. Dumes
Notary Public.

15-163-20014-00-00
WELL LOG

COMPANY Petroleum, Inc.

SEC. 24 T. 10S R. 19W

FARM Vohs

NO. 1

LOC. App. NE NW

TOTAL DEPTH 3265'

COUNTY Rooks

COMM. 4-12-67

COMP. 4-17-67

CONTRACTOR Garvey Drilling Company

CASING 8 5/8" @ 209' w/175 sx

ELEVATION 2074' KB

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

- 90' Top Soil and Post Rock
- 923' Shale
- 960' Sand
- 1145' Shale
- 1165' Sand
- 1438' Shale
- 1477' Anhydrite
- 1760' Shale and Shells
- 2325' Shale and Lime
- 2360' Lime
- 2773' Lime and Shale
- 3140' Shale and Lime
- 3239' Lime and Shale
- 3265' Lime
- 3265' RTD

RECEIVED
STATE CORPORATION COMMISSION
MAY 2 1967
05-02-1967
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas
County of Barton } ss

I, Sam N. Stephens of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Vohs No. 1 well.

Subscribed and sworn to before me this 27th day of April 19 67

My Commission Expires: November 5th, 1969

Sam N. Stephens
Richard A. Boye
NOTARY PUBLIC

