


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County. Sec. 10 Twp. 10 Rge. (E) 20 (W)
Location as "NE/CNW/SW" or footage from lines SW 1/4 SW 1/4 NE 1/4
Lease Owner Barnett Oil Company
Lease Name Sparks "A" Well No. 3
Office Address 417 First Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 14, 19 53
Application for plugging filed January 14, 19 53
Application for plugging approved January 14, 19 53
Plugging commenced January 14, 19 53
Plugging completed January 14, 19 53
Reason for abandonment of well or producing formation Dry Hole

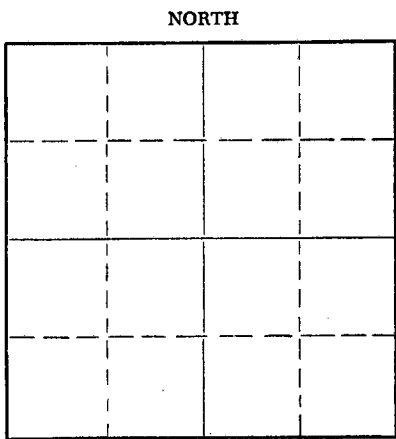

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3848 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Casing				8 5/8"	140 ft.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3848 feet to 140 feet. Set wooden plug at 140 feet and filled casing with 1/2 sack hulls and 15 sacks of cement to 93 feet. Filled surface casing with heavy mud from 93 feet to 40 feet. Set wooden plug at 40 feet and filled casing with 1/2 sack of hulls and ten sacks of cement to bottom of cellar.


RECEIVED
STATE CORPORATION COMMISSION
JAN 17 1953
0117 1953
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnett Drilling, Inc.
Address 623 First Nat'l Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. R. Hunter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter
417 First Nat'l Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of January, 1953.
February 27, 1956.
Mildred J. Wilks
Notary Public.



PLUGGING
FILE SEC 10 T 10 R 20W
BOOK PAGE 72 LINE 15

15-163-03399-00-00

BARNETT OIL COMPANY
LOG OF SPARKS "A" WELL NO. 3
SW $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$ SECTION 10-10S-20W
ROOKS COUNTY, KANSAS

DATE COMMENCED: January 1, 1953

DATE COMPLETED: January 14, 1953

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Surface Clay	0	10	
Rock	10	30	
Sand	30	50	
Shale and Shells	50	140	
			Set 8 5/8" Surface Pipe at 140 feet; cemented with 125 sacks of cement.
Shale	140	1200	
Sand	1200	1375	
Shale and Shells	1375	1708	
Anhydrite	1708	1743	
Shale and Shells	1743	2400	
Lime and Shale	2400	2560	
Lime	2560	2690	
Lime and Shale	2690	3405	
Lime	3405	3848	
Total Depth		3848	Dry and Abandoned.

01-17-1959
FILED
COUNTY CLERK
ROOKS COUNTY, KANSAS

PLUGGING
FILE SEC 10 T 10 R 20W
BOOK PAGE 23 LINE 15