


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-065-00534-00-00

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Graham

County. Sec. 35 Twp. 9s Rge. 24 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE NE SE

Lease Owner Francis Oil and Gas Inc.

Lease Name Sproul - B-5CC Well No. 1

Office Address Tulsa, Okla.

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed Feb 22 1958

Application for plugging filed Feb 24 1958

Application for plugging approved Feb 28 1958

Plugging commenced Apr 8 1958

Plugging completed Apr 12 1958

Reason for abandonment of well or producing formation None productive

If a producing well is abandoned, date of last production none 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A.D. FABRICIUS

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4045' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	209'	none
				5 1/2	4043'	3241'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 4023' to 3965'. Mixed and dumped 5 sx. cement from 3965' to 3925'. Pulled 5 1/2 casing. Mudded to 205' and set 5' rock bridge from 205' to 200'. Mixed and dumped 15 sx. cement from 200' to 155'. Mudded from 155' to 35'. Set 5' rock bridge from 35' to 30'. Mixed and dumped 10 sx. cement from 30' to base cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor ACE PIPE PULLING CO.

Address BOX 304 GREAT BEND KS.

STATE OF Kansas, COUNTY OF Barton, ss.

I, W. J. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Hall


(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of April, 1958

My commission expires _____

RECEIVED
N. COMMISSIONER

Notary Public.

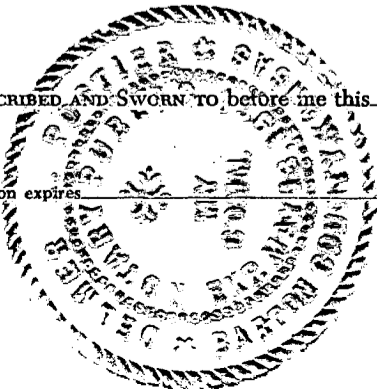

APR 23 1958
04-23-1958
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 35 T 9 R 246
BOOK PAGE 86 LINE 39

15-065-00534-00-00

WELL LOG

No. 1 Sprial

Francis Kaiser

Horace George Kaiser
909 Palace Building
Tulsa, Oklahoma

Elevation: 2477' DF
2475' ORD
2480' KB

Completed: 2/13/58
2/22/58 (Rotary)

No. 1 Sprial

NE NE SE Sec. 35-9S-24W
Graham County, Kansas

Contractor: Chief Drilling Co., Inc.
Rotary: 0 - 4045' T.D.

Casing Record: Set 209' of 8 5/8" 32# casing w/165 sacks Pennix. Cement circulated:
5 1/2" casing cemented @ 4044' w/150 sacks cement.

Figures Indicate Bottoms of Formations

Clay, Sand & Shale	0 - 209
Shale	209 - 950
Shale & Sand	950 - 1050
Shale & Shells	1050 - 1490
Shale, Sand & Hard Shells	1490 - 1620
Sand & Shells	1620 - 1660
Sand	1660 - 1855
Shale	1855 - 1960
Hard Sand & Pyrite	1960 - 1970
Shale	1970 - 2095
Anhydrite	2095 - 2145
Shale & Shells	2145 - 2335
Shale & Lims	2335 - 3195
Lims	3195 - 4095' T.D.

Formation Top & Min

Anhydrite	2095 + 385
Base of Anhydrite	2145 + 340
Topchm	3520 - 1040
Hookmor	3784 - 1304
Toronto	3808 - 1328
Landing KC	3822 - 1342
Base of IC	4026 - 1546

STATE CORP. DIVISION

MAR 4 1958

CONSERVATION DIVISION
Wichita, Kansas

State of Kansas)
County of Barton)

I hereby certify that the above is a true and correct copy of Driller's Log of well drilled in the NE NE SE Sec. 35-9S-24W, Graham County, Kansas to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hector, President

Subscribed to and sworn to before me this 24th day of February, 1958.

Carson Reinhardt Lohrer,
Notary Public

My commission Expires:
Jan. 26, 1959.

PLUGGING
FILE SEC 35-9-24W
BOOK PAGE 86 LINE 59