

15-065 - 00703-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Graham

County. Sec. 36 Twp. 9 Rge. (E) 24 (W)

Location as "NE/CNWxSWx" or footage from lines SW SW SE

Lease Owner Herndon Drilling Company

Lease Name Mullaney Well No. 1

Office Address Drawer 489, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 3-8-55 19

Application for plugging filed 2-8-55 19

Application for plugging approved 3-8-55 19


Plugging commenced 3-8-55 19

Plugging completed 3-9-55 19

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

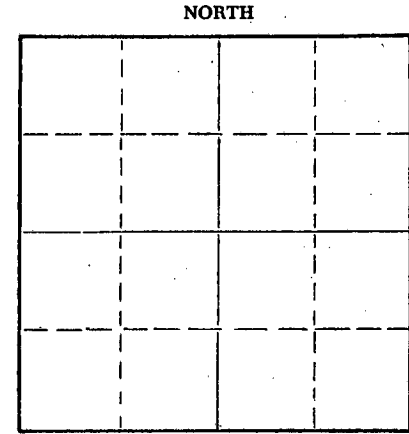

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4500 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8.58	250	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 300 ft. Put in two Halliburton plugs, pumped 100 sks. cement on plugs to 300 ft. Left Swedge in pipe to hold vacuum on plugs.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Herndon Drilling Company
Address Drawer 489, Tulsa, Oklahoma

03-17-1955

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

W. G. Prather

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

W. G. Prather

SUBSCRIBED AND SWORN TO before me this 15th day of March, 19 55.

My commission expires Sept. 19, 1956

John M. Moore
Notary Public.

PLUGGING
FILE SEC 36 T 9 R 24
BOOK PAGE 103 LINE 22

15-065-00703-00-00

WELL LOG ON MULLANEY #1

Spudding date: 2/21/55
Date casing set: 2/21/55
Date rotary completed: 3/8/55
Date cable completed:

Location:
Sec. 36-9S-24W - Graham, Kansas

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>	<u>REMARKS</u>
0	1140	Surface Hole	Ran 8 Jts. 8-5/8" 24# Casing @ 250'
1140	1865	Shale & Sand	Cemented w/ 150 Sx. Pozmix & 2% CC
1865	2065	Shale & Red Bed	
2065	2100	Anhydrite	
2100	2405	Shale & Shells	
2405	3010	Shale & Lime	
3010	3088	Lime	
3088	3830	Shale & Lime	
3830	3983	Lime	
3983	4161	Lime & Shale	
4161	4177	Lime	
4177	4285	Lime & Shale	
4285	4333	Lime	
4333	4356	Lime & Chert	
4356	4500	Lime	
4500		Total Depth	

Plugging hole w/ 2 plugs & 100 Sx. Pozmix

Subscribed and sworn to before me this 16th
day of March, 19 55

I certify the above and foregoing to be a true and exact
copy of the original driller's log on the MULLANEY #1

HERNDON DRILLING COMPANY



Notary Public
My commission expires: 4/22/57

By: (Signature)
Title: Assistant Secretary

PLUGGING
BOOK PAGE 103 LINE 221