


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

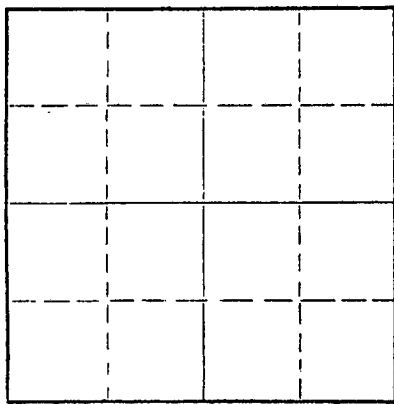

Locate well correctly on above Section Plat

Graham County, Sec. 16 Twp. 10 Rge. 21 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Commercial Oil Co.
Lease Name Noah "E" Grecian Well No. #1
Office Address 5252 N. Broadway, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7-31-69 19
Plugging completed 8-1-69 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 3815' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3650'	997.29'
				8 5/8"	165'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3410'. Mixed and ran 3 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls, 20 sacks gel, 100 sacks cement from 800' to 475'.
7 sacks gel from 475' to 195'. 20 sacks cement from 195' to 130'. 3 sacks gel from 130' to 30'. 10 sacks cement from 30' to 0'.

RECEIVED
STATE CORPORATION COMMISSION
AUG 5 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer, Jr.
Box 364, Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 4 day of August, 1969

My commission expires October 1972
Notary Public Seal

Sidney Miller
Notary Public

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
608 East Murdock, Wichita, Kansas

COPY


15-065-00342-00-01

Company JONES, SHELburnE & FARMER, INC.
Farm Noah "E" No. 1

SEC. 16 T. 10 R. 21W
NE NE SW

Total Depth. 3815
Comm. 3-15-52 Comp. 3-24-52
Shot or Treated.
Contractor.
Issued. 6-7-52

County Graham
KANSAS



CASING:
8 5/8" 165' cem w/100 ec

Elevation. 2170 DE

Production. dry.

Figures Indicate Bottom of Formations.

shale, shells	140
sand shale, shells	1240
shale, shells	2240
lime, shale	3550
lime	3665
shale, lime	3790?
arbuckle	3790?
lime	3815
Total Depth	

Tops:	
Heebner	3196 3396
Toronto Lime	3421
Lansing-Kansas City	3437
Marmaton Lime	3685
Arbuckle	3773

RECEIVED
STATE CORPORATION COMMISSION
JUL 24 1969
CONSERVATION DIVISION
Wichita, Kansas

07-24-1969