

15-065-21327-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County, Sec. 20 Twp. 10S Rge. 21W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
NE NW SW


Lease Owner Calvin Noah
Lease Name NOAH "B" Well No. 1
Office Address 329 N. Birch, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

Date Well completed November 19 1980
Application for plugging filed November 19 1980
Application for plugging approved November 19 1980
Plugging commenced November 19 1980
Plugging completed November 19 1980

Reason for abandonment of well or producing formation _____
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production _____
_____ 19 _____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3940'
Show depth and thickness of all water, oil and gas formations.

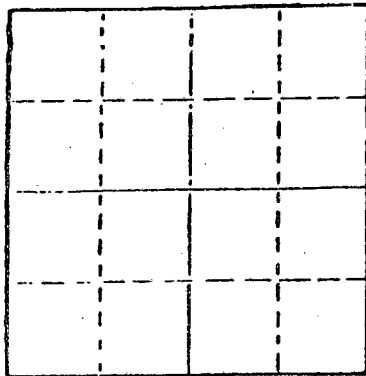

Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

T.D. 3940'
Set 1st Plug @ 800' with 70 sx.
Set 2nd Plug @ 240' with 20 sx.
Set 3rd Plug @ 40' solid bridge with 10 sx.
Rathole with 5 sx, 50/50 posmix, 6% gel

Plug was down at 9:45 a.m. 11/19/80.

RECEIVED
STATE CORPORATION COMMISSION

DEC - 9 1980
12-09-1980

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet.)

Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec./Treasurer (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of December, 1980

My commission expires 8-18-84

Jeanette A. Metheny
Jeanette A. Metheny Notary Public.



15-065-21327-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	Calvin Noah
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	NOAH "B" #1
LOCATION:	NE NW SW Section 20-10S-21W
SPUD DATE:	11/12/80
COMPLETION DATE:	11/19/80

0	1557	Shale & Sand
1557	1767	Shale
1767	1816	Anhydrite
1816	2754	Shale
2754	3450	Shale & Lime
3450	3882	Lime
3882	3905	Conglomerate
3905	3920	Conglomerate & Arbuckle
3920	3940	Arbuckle
	3940	RTD

Spud hole at 8:15 p.m. 11/12/80. Drilled 245' of a 12 1/4" hole. Ran 6 jts. of 8 5/8" - 20# casing (tally 237.86'). Set at 244' RTD. Cemented with 175 sx. of common, 3% c.c., 2% gel. Cement did circulate. Plug was down @ 1:00 a.m. 11/13/80.

T.D. 3940', Set 1st Plug @ 800' with 70 sx., 2nd plug @ 240' with 20 sx. 3rd Plug @ 40' solid bridge with 10 sx. Rathole with 5 sx., 50/50 posmix, 6% gel. Cement by Halliburton. Plug was down @ 9:45 a.m. 11/19/80.

SAMPLE TOPS:

Anhydrite 1767'
B/Anhydrite 1816'

RECEIVED
STATE CONSERVATION COMMISSION
DEC - 9 1980
12-09-1980
CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the NOAH "B" #1, NE NW SW, Section 20-10S-21W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
Jack L. Partridge, Assistant Sec./Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 4th day of December, 1980.



Jeanette A. Metheny
Jeanette A. Metheny, Notary Public