

15-065-20067-00-00

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 9 Twp. 9S Rge. 25W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SE NE

Lease Owner Empire Drilling Co.

Lease Name Sparks Well No. 1

Office Address 650 Fourth National Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 8-9-67 19

Application for plugging filed 8-8-67 19

Application for plugging approved 8-8-67 19


Plugging commenced 8-8-67 19

Plugging completed 8-9-67 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

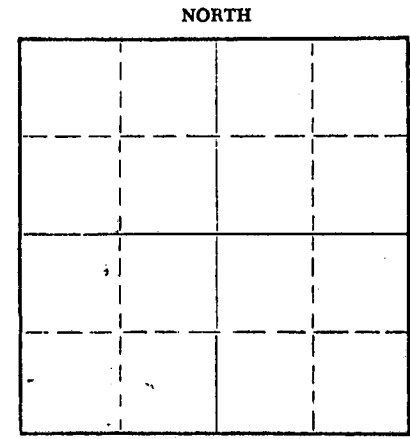

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4100 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	230'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged hole with 100 sks. Posmix @ 1980'  
Spotted cemented (20 sks.) @ 210', 1/2 sk. hulls, plug, 10 sks. cement

RECEIVED  
STATE CORPORATION COMMISSION

AUG 14 1967

CONSERVATION DIVISION  
Wichita, Kansas

8-14-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.

Address Box 486, Great Bend, Kansas 67530


STATE OF KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

Box 486, Great Bend, Kansas 67530  
(Address)

before me this 11th day of August, 19 67



My commission expires April 1, 1971

Ulanda Nichols  
Notary Public.

DRILLER'S LOG

COMPANY: Empire Drilling Company  
 CONTRACTOR: LEBEN DRILLING, INC.  
 FARM: SPARKS #1  
 LOCATION: C SE NE SECTION 9-9S-25W  
 GRAHAM COUNTY, KANSAS  
 COMMENCED: 7-31-67  
 COMPLETED: 8-9-67

0. 1340  
 1340 2025  
 2025 2260  
 2260 2290  
 2290 3665  
 3665 3810  
 3810 3895  
 3895 4100  
 4100

Shale, Shells  
 Shale  
 Redbed, Shale  
 Anhydrite  
 Shale  
 Shale, Lime  
 Lime, Shale  
 Lime  
 RTD - DED& A.

RECEIVED  
 OIL & GAS CORPORATION COMMISSION  
 AUG 14 1967  
 8-14-67  
 CONSERVATION DIVISION  
 Wichita, Kansas

8 5/8" 8 rd. 24# used surface casing set @ 230' cemented with 160 sacks Common, 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Sparks #1 Well, located C SE NE of Section 9, Township 9 South, Range 25 West, Graham County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite  
 Leslie Kite

STATE OF KANSAS )  
 ) SS  
 COUNTY OF BARTON )

Subscribed and sworn to and for Barton County, Kansas, this 11th day of August, 1967.



Ulanda Nichols  
 Ulanda Nichols