


STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-065-00828-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH



Locate well correctly on above  
Section Plat

Graham County, Sec. 18 Twp. 9S Rge 25 (X) W (W)  
Location as "NE/CNW&SW¼" or footage from lines NW NW SE  
Lease Owner Leben Drilling, Inc.  
Lease Name McFadden Well No. 1  
Office Address 905 Central Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 4-10-59 19  
Application for plugging filed 4-10-59 19  
Application for plugging approved 4-10-59 19  
Plugging commenced 4-10-59 19  
Plugging completed 4-10-59 19  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4175 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	234'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st plug @ 400' w/ 20 sx cement  
2nd plug @ 234' w/ 20 sx cement  
Top plug @ 40' w/ 10 sx cement

RECEIVED  
STATE CORPORATION COMMISSION

APR 18 1959

CONSERVATION DIVISION  
Wichita, Kansas


4-18-59

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Leben Drilling, Inc.  
Address 905 Central Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Frank Hamlin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Frank Hamlin  
905 Central Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of April, 19 59  
My commission expires June 17, 1961  
Ruth N. Benjamin  
Notary Public.



PLUGGING  
FILE SEC. 18 T. 9 R. 25W  
BOOK PAGE 32 LINE 34

15-065-00828-00-00

RECEIVED  
STATE COMMISSION

APR 18 1959

CONSERVATION DIVISION  
Wichita, Kansas

4-18-59

DRILLER'S LOG

COMPANY:  
CONTRACTOR:  
FARM:  
LOCATION:

LEBEN DRILLING, INC.  
LEBEN DRILLING, INC.  
MC FADDEN #1  
NW NW SE SECTION 18-9S-25W  
GRAHAM COUNTY, KANSAS  
4-2-59  
4-10-59

COMMENCED:  
COMPLETED:

0	35	Clay		
35	125	Sand & Shale		
125	234	Shale & Shells		
234	595	Shale & Shells	Heebner	3883
595	1470	Sandy Shale	Toronto	3905
1470	1630	Shale & Sand	Lansing	3925
1630	1820	Shale	Bs. K.C.	4153
1820	2000	Shale & Shells	RTD	4175
2000	2330	Redbed & Shale		
2330	2372	Anhydrite		
2372	2550	Shale & Shells		
2550	2780	Shale & Lime		
2780	2935	Shale		
2935	3050	Shale & Lime		
3050	4030	Lime & Shale		
4030	4080	Lime		
4080	4175	Shale & Lime		
	4175	Rotary Total Depth - D & A		

LOG TOPS:

Set 8 5/8" surface casing @ 234' with 135 sacks Sunset cement.

I, Frank Hamlin, do hereby certify that the above and foregoing is a true and correct copy of the log of the McFadden #1, located NW NW SE of Section 18-Township 9S-Range 25W, Graham County, Kansas, as reflected by the files of Leben Drilling, Inc.


LEBEN DRILLING, INC.

By: Frank Hamlin  
Frank Hamlin

STATE OF KANSAS }  
COUNTY OF SEDGWICK } SS.

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 14th day of April, 1959.

Ruth N. Benjamin  
Ruth N. Benjamin, Notary Public

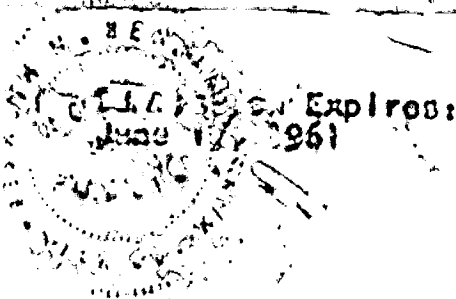

PLUGGING  
FILE SEC. 18 T. 9 R. 25N  
BOOK PAGE 32 LINE 34