


Give All Information Completely
Make Required Affidavit
File or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Sheridan County, Sec. 5 Twp. 9S Rge. 27W E
Location as "NE/CNW/SW" or footage from lines
NE SW SE

Lease Owner Skyline Petroleum
Lease Name Kennedy Well No. #1
Office Address P. O. Box 70, Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

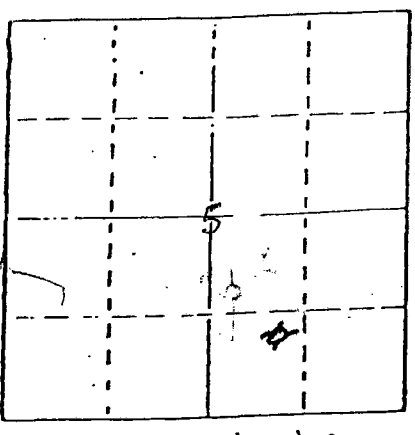

Date Well completed November 8, 1983
Application for plugging filed November 8, 1983
Application for plugging approved November 8, 1983
Plugging commenced November 8, 1983
Plugging completed November 8, 1983
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
N/A 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4100'
Flow depth and thickness of all water, oil and gas formations. \$133.25

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand				8 5/8"	260'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

2300'	20 SX
1413'	100 SX
290'	40 SX
40'	10 SX
RH	10 SX

50 - 50 POZ 6% gel 3% ccl 6:00 PM

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Sun Oilwell Cementing, Great Bend, Kansas

STATE OF KANSAS COUNTY OF ELLIS, ss.
Daniel F. Schippers (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
filed and that the same are true and correct. So help me God.

(Signature) Daniel F. Schippers
P. O. Box 70, Hays, KS 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of December, 1983

Darlene Pearson
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

DEC 12 1983
12-12-1983
CONSERVATION DIVISION
Wichita, Kansas