


15-179-20282-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

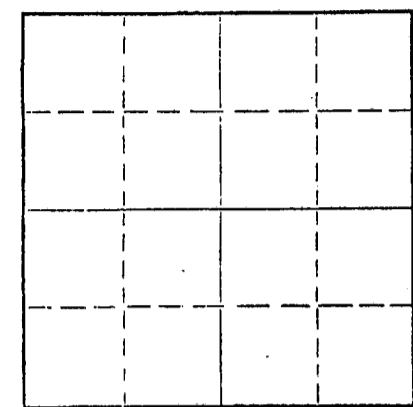

Sheridan County, Sec. 12 Twp. 9 Rge. 27 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NW NE
Lease Owner Don E. Pratt Oil Operations
Lease Name Mickey Well No. 2
Office Address P. O. Drawer 370, Hays, Kansas 67601
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-12-1971
Application for plugging filed 5-12-1971
Application for plugging approved 5-12-1971
Plugging commenced 5-12-1971
Plugging completed 5-12-1971
Reason for abandonment of well or producing formation Dry Hole

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	256'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug was set at 1200' with 100 cu. ft. cement
2nd plug was set at 275' with 25 cu. ft. cement
3rd plug was set at 40' with 10 cu. ft. cement

RECEIVED
STATE CORPORATION COMMISSION
MAY 17 1971
CONSERVATION DIVISION
Wichita, Kansas

05-17-1971


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dreiling Oil, Inc.
Address Victoria, Kansas 67671

STATE OF KANSAS, COUNTY OF ELLIS, ss.

I, Leo F. Dreiling, Pres. of Drlg. Contr. (producer of well) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) Leo F. Dreiling
LEO F. DREILING, ROUTE 2, VICTORIA, KANSAS 67671
(Address)



Subscribed and sworn to before me this 14th day of May, 1971

My commission expires January 13, 1975
Patty Dreiling
Notary Public.

DREILING OIL, INC.

Victoria, Kansas 67671

15-179-20282-00-00

WELL LOG

Company	Don E. Pratt Oil Operations P. O. Drawer 370 Hays, Kansas 67601	Sec. 12	Twp. 29	Rng. 27
Farm	Mickey No. 2	Location	NE NW NE	
Total Depth	3849'	County	Sheridan	
Comm.	5-8-71 Comp. 5-12-71	Elevation:	2667'	K. B.
Contractor	Dreiling Oil, Inc. Victoria, Kansas 67671		2664'	D. F.
			2662'	G. R.

Casing Record

256' - 8 5/8"

Cement Record

165 sacks cement

Production:

D & A

Figures Indicate Bottom of Formations

0'	150'	Clays, Yellow Clay
150'	160'	Shale
160'	256'	Yellow Clay & Blue Shale
256'	410'	Shale
410'	1326'	Shale
1326'	1883'	Shale & Sand Streaks
1883'	2059'	Sand
2059'	2220'	Shale
2220'	2269'	Shale
2269'	2308'	Anhydrite
2308'	2460'	Shale
2460'	2570'	Shale & Shell
2570'	2826'	Shale & Red Bed
2826'	2865'	Fort Riley
2865'	3060'	Lime
3060'	3285'	Lime & Shale
3285'	3403'	Lime
3403'	3585'	Lime & Shale
3585'	3725'	Lime
3725'	3790'	Lime
3790'	3849'	Lime
3849'	T.D.	

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

RECEIVED
STATE CORPORATION COMMISSION
MAY 17 1971
CONSERVATION DIVISION
Wichita, Kansas
05-17-1971

I, Leo F. Dreiling, of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Mickey #2.

Leo F. Dreiling
LEO F. DREILING

and sworn to before me this 14th day of May, 1971.

Patty Dreiling
PATTY DREILING NOTARY PUBLIC

