

TO: STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-007-20662-00-00 *Per Dent 1, 6PS'd footages correct.*
 Spot: ~~SWNWNE~~ *NW SW NE* Sec/Twnshp/Rge: 6-32S-15W *KCC 2/3*
 366 ~~3990~~ feet from ~~N~~ Section Line, 2310 feet from E Section Line
 Lease Name: RUSK C *2222* Well #: 1
 County: BARBER Total Vertical Depth: 4910 feet

Operator License No.: 30991
 Op Name: WALKER, DALE R. DBA RED CEDAR OI
 Address: 1405 N WALNUT PO BOX 221
MEDICINE LODGE, KS 67104

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4715		WITH 2 SX CMT
PROD	4.5	4909	2700	WITH 150 SX CMT <i>159.58</i>
SURF	8.625	435		WITH 375 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/09/2007 12:00 PM
 Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
 Proposal Rcvd. from: DALE WALKER Company: RED CEDAR OIL Phone: (620) 886-3951

Proposed Plugging Method: CIBP @ 4715' WITH 2 SX CMT. PLUG AT 1200' WITH 10 SX GEL - 50 SX CMT. PLUG AT 450' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
 Date/Time Plugging Completed: 10/09/2007 1:15 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4715' WITH 2 SX CMT ON TOP OF CIBP. LAID DOWN CASING & RUN 2 3/8" TUBING IN TO PLUG THROUGH. 1ST PLUG AT 1200' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 450' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4861	4866		
4845	4850		
4804	4809		

INVOICED
 DATE 10/22/07
 INV. NO. 2008060642

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

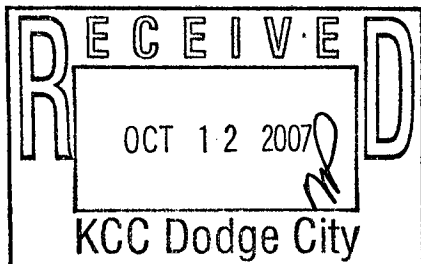

Signed

Stephen J. Pfeifer
 (TECHNICIAN)

RECEIVED
 KANSAS CORPORATION COMMISSION

Form CP-2/3

OCT 18 2007

CONSERVATION DIVISION
 WICHITA, KS