

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-23908-00-00
Spot: SESWNW Sec/Twnshp/Rge: 25-19S-22W
2310 feet from N Section Line, 920 feet from W Section Line
Lease Name: BORGER Well #: 3
County: NESS Total Vertical Depth: 4393 feet

Operator License No.: 8996
Op Name: MID-CONTINENT RESOURCES, INC.
Address: PO BOX 399
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1470		WITH 250 SX CMT
PROD	5.5	4381	0	WITH 125 SX CMT
SURF	8.625	519		WITH 250 SX CMT

142.77

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/21/2007 5:50 PM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: SCOTT CORSAIR Company: MID-CONTINENT RESOURCES Phone: (785) 398-2270

Proposed Plugging Method: PUMP 60 SX CMT AND 400# HULLS, THEN SPACER TO ANHYDRITE THEN CMT TO SURFACE. 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 09/21/2007 7:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PORT COLLAR AT 1470' WITH 250 SX CMT PUMPED 60 SX CMT & 400# HULLS, THEN SPACER TO ANHYDRITE. THE 160 SX CMT WAS ON A VACUUM. BACKSIDE WAS FULL OF CMT. WAITED 40 MINUTES AND TOPPED OFF CASING WITH 80 SX CMT. ON 9/24/07: CMT HAD FALLEN 600'. TOPPED OFF WITH 60 SX CMT. CASING STAYED FULL.

Perfs:

Top	Bot	Thru	Comments
4381	4393		


INVOICED
DATE 10/18/07

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

INV. No. 2008060613

Plugged through: CSG

District: 01

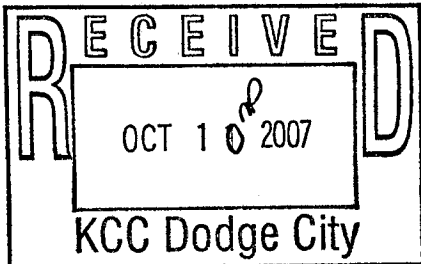

Signed

Michael Maier
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION Form CP-2/3

OCT 15 2007

CONSERVATION DIVISION
WICHITA, KS