

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202


Thomas County, Sec. 19 Twp. 9S Rge. 32W 19/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW/4 NW/4 SW/4

Lease Owner Beren Corporation
Lease Name Keller Well No. 1
Office Address 970 4th Financial Center, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole) D & A

Date Well completed June 27, 1977
Application for plugging filed June 27, 1977
Application for plugging approved June 27, 1977
Plugging commenced June 27, 1977
Plugging completed June 27, 1977
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

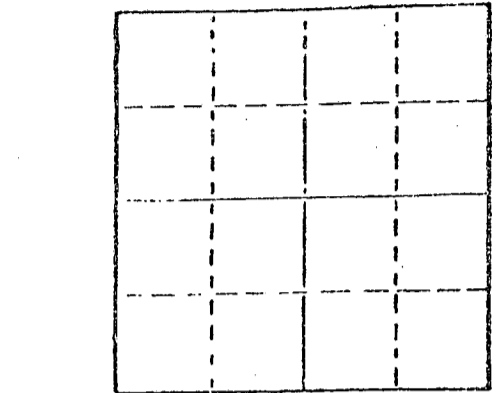

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,730'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	319'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug #1 @ 1,650' w/70 sx cement
Plug #2 @ 240' w/20 sx cement
Plug #3 @ 40' w/10 sx cement
Cement - 50/50 Pozmix, 6% Gel

JUL 11 1977
07-11-1977
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~xxxxxx~~)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND sworn to before me this 29th day of June, 1977.



Dawn Drennan
Notary Public.

My commission expires _____

DRILLERS LOG

15-193-20130-00-00

No. 1 Keller

CASING RECORD:	COMPANY: Beren Corporation	DESCRIPTION:
8 5/8" @ 327' w/250 sx cement	CONTRACTOR: Red Tiger Drilling Company	SW/4 NW/4 SW/4 Sec. 19-T9S-R32W Thomas County, Kansas
	COMMENCED: June 13, 1977	
	COMPLETED: June 27, 1977	
TOTAL DEPTH: 4,730'		ELEVATION: 3,108' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Clay, Shale, Sand	0	330	
Shale	330	2650	
Anhydrite	2650	2699	
Shale	2699	3060	
Shale & Lime	3060	3200	
Lime & Shale	3200	3328	
Shale	3328	3370	
Shale & Lime	3370	3485	
Lime	3485	4730	
RTD		4730	

RECEIVED
STATE CORPORATION COMMISSION
07-11-1977
JUL 11 1977
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 29th day of June, 1977.

D'Ann Drennan
Notary Public

