

**KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION**
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 083-21347-0001 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date _____.

Well Operator: Pickrell Drilling Company, Inc. KCC License #: 5123
(Owner / Company Name) (Operator's)

Address: 100 S. Main, Suite 505 City: Wichita

State: Kansas Zip Code: 67202 Contact Phone: (316) 262 - 8427

Lease: King Well #: 1 Sec. 7 Twp. 21S S. R. 24 East West

150'S of SE NW NW Spot Location / QQQQ County: Hodgeman

4470 4518 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

4620 4802 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # D-26615 ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8 Set at: 253 Cemented with: 160 Sacks

Production Casing Size: 4 1/2" Set at: 4409 Cemented with: 150 sx. bottom Sacks

List (ALL) Perforations and Bridgeplug Sets: See Well Sketch Attached DV tool @ 1510 w/ 350 sx.

CIBP @ 4165' + 4380' PER ATTACHED

Elevation: 2295 (G.L. / K.B.) T.D.: 4417 P.B.T.D.: 4165 Anhydrite Depth: 1530 (Top)
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): (Tight casing 2950-3200)

SEE ATTACHED PROPOSED METHOD OF PLUGGING

RECEIVED
KANSAS CORPORATION COMMISSION

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

JUL 07 2008

If not explain why? _____ CONSERVATION DIVISION
WICHITA, KS

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Ed Mondero

Phone: (620) 793 - 2315

Address: P.O. Box 375 City / State: Ness City, Kansas 67560

Plugging Contractor: Allied Cementing Co., LLC KCC License #: 99996
(Company Name) (Contractor's)

Address: N. Hwy 281, P.O. Box 628, Great Bend, KS 67530 Phone: (620) 793 - 5861

Proposed Date and Hour of Plugging (if known?): July 10, 2008

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: July 3, 2008 Authorized Operator / Agent: _____
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2070, Wichita, Kansas 67202

Flags per GPS 7/10/03 KCC min 7/11/08

Ed Mondero
(Signature)

King #1 SWDW

Proposed Method of Plugging

Run 2 3/8" tubing open-ended to 2900 ft. spot 25 sx. cement. Pull tubing up to 2000 ft. and spot 25 sx. cement. Pull tubing up to 1400 ft. and spot 25 sx. cement. Pull tubing up to 200 ft. and circulate cement to surface. POOH w/ tubing and fill to surface w/ cement. Tie into 8 5/8 x 4 1/2 annulus and attempt to pump fluid. If able to pump fluid, fill w/ cement. Make sure surface pipe is below farming level and fill and level hole.

NOTE: Cementing tickets for initial cementing of casing are attached.

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 07 2008

CONSERVATION DIVISION
WICHITA, KS

BAKER SERVICE TOOLS - TALLY PAD


New Completion Workover

Oil Company _____ Well No. 1 SWW Field Valley Lease King
Company Man _____ Date Drilled 11/90 County Hodgeman State Kansas

150' S of C N/2 NW Sec 7-215-24W

API # 15-083-21347-0001

Docket N° D-26615

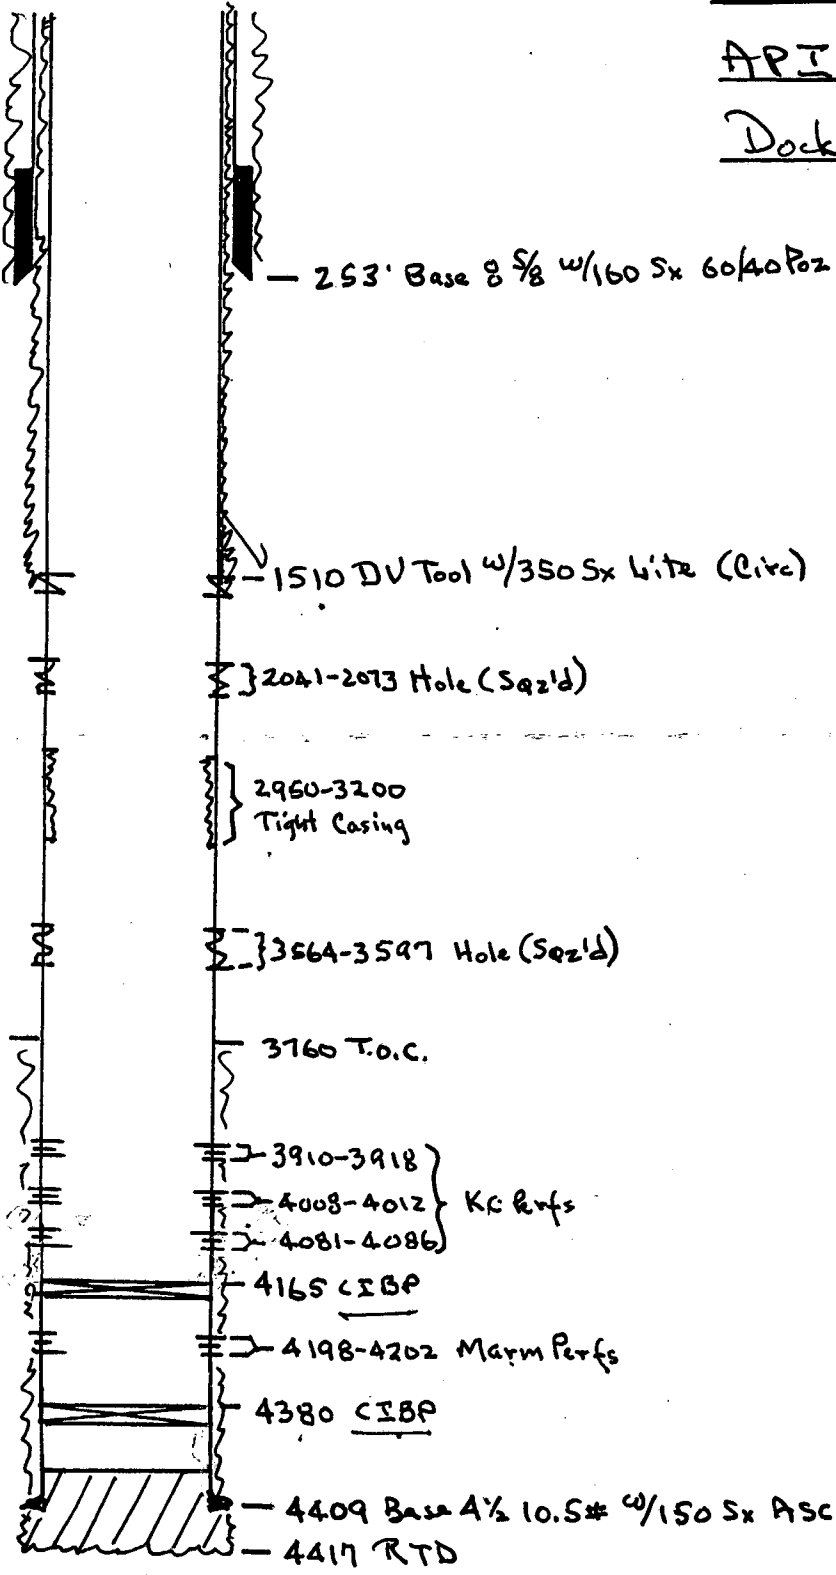

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 07 2008

CONSERVATION DIVISION
WICHITA, KS

ORIGINAL

Russell, Kansas
793-5861, Great Bend, Kansas

Phone Plainville 913-434-2812
Phone Ness City 913-798-3842

ALLIED CEMENTING CO., INC.

No 7160

Home Office P. O. Box 31

Russell, Kansas 67665

New

Date	Sec	Twp.	Range	Called Out	On Location	Job Start	Finish
10-30-90	7	21	24	1:30 AM	3:15 AM	7:00 AM	7:30 AM
Lease King	Well No. 1	Location Ness south to LL 15.5W			County Hodgeman	State KS	

Contractor <u>Emporis Oil Operations</u>	
Type Job <u>Surface</u>	
Hole Size <u>12 1/4</u>	T.D. <u>255'</u>
Csg. <u>8 5/8</u>	Depth <u>253'</u>
Tbg. Size	Depth
Drill Pipe	Depth
Tool	Depth
Cement Left in Csg. <u>15'</u>	Shoe Joint
Press Max.	Minimum
Meas Line <u>ND</u>	Displace <input checked="" type="checkbox"/> <u>15.1</u>

Owner Black Diamond
 To Allied Cementing Co., Inc.
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.

Charge To Black Diamond Oil Inc
 Street 3004 Broadway Ave
 City Hays State Ks. 6760
 The above was done to satisfaction and supervision of owner agent or contractor

Purchase Order No.
 X Tom Allen

COMMISSION CEMENT

Amount Ordered	<u>160</u>	<u>60/40</u>	<u>270 gal</u>	<u>3% CC</u>
Consisting of	Common	<u>96</u>	<u>5.00</u>	<u>480.00</u>
	Poz. Mix	<u>64</u>	<u>2.25</u>	<u>144.00</u>
	Gel.	<u>3</u>	<u>6.75</u>	<u>NIC</u>
	Chloride	<u>5</u>	<u>21.00</u>	<u>105.00</u>
	Quickset			

EQUIPMENT

No.	Cementer	Helper	Driver
umptrk # <u>158</u>			
umptrk # <u>19</u>	<u>JAYSON DREILING</u>	<u>BILL S.</u>	<u>BILL W.</u>

DEPTH of Job		
Reference:	<u>Pump trk charge</u>	<u>380.00</u>
	<u>18 Mileage</u>	<u>36.00</u>
	<u>1-8 5/8 TWP</u>	<u>42.00</u>
	Sub Total	
	Tax	
	Total	<u>458.00</u>

Remarks: Cement did circulate.
 BY Allied Cementing
Jayson Dreiling
Thank you.

Handling	<u>160</u>	<u>1.00</u>	<u>160.00</u>
Mileage	<u>18</u>		<u>86.40</u>
Sales Tax			
Sub Total			
Total			<u>975.40</u>

Floating Equipment

Total \$ 1433.40
 Disc - 286.68
\$ 1146.72

627, Russell, Kansas

793-5861, Great Bend, Kansas

Phone Plainville 913-434-2812

Phone Ness City 913-798-3843

ALLIED CEMENTING CO., INC. N° 8272

Home Office P. O. Box 31

Russell, Kansas 67665

New

Date	11-7-90	Sec	7	Twp.	21	Range	24	Called Out	3:30 AM	On Location	5:30 AM	Job Start	8:30 AM	Finish	9:40 AM
Lease	King	Well No. #	1			Location	Jetmore 11n, 5w, s into			County	Haskell		State	Ks.	

Contractor	Empkoin Dlg # 7	
Type Job	Two-stage Bottom	
Hole Size	7 7/8	T.D. 4409'
Csg.	4 1/2 10 1/2 #	Depth 4409'
Tbg. Size		Depth
Drill Pipe		Depth
Tool		Depth
Cement Left in Csg.	43.	Shoe Joint 43
Press Max.	1100#	Minimum
Meas Line	✓	Displace 69.50 bbls
Perf.		

Owner	To Allied Cementing Co., Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.	
Charge To	Block Diamond Oil Inc	
Street	3004 Broadway Ave	
City	Hays	State Ks. 67601
The above was done to satisfaction and supervision of owner agent or contractor.		
Purchase Order No.	10m AH	
X		

CEMENT

Amount Ordered	150 ASC 20 bbl WFR II	
Consisting of		
Common	150 ASC	7.25 1087.5
Poz. Mix		
Gel.		
Chloride		
Quickset	WFR II 820 gals	.50 410.0
		Sales Tax
Handling	150	1.00 150.00
Mileage	18	108.00

RECEIVED
KANSAS CORPORATION COMMISSION
JUL 07 2008
Total 1755.5

EQUIPMENT

Gt. Bend		
No.	Cementer	Steve Klapper
Pumptrk # 95	Helper	Jack
No.	Cementer	Phil
Pumptrk	Helper	
	Driver	Yanny
Bulktrk # 101		
Bulktrk	Driver	Bob

DEPTH of Job	4409'
Reference:	Pump Truck 880.00
18	Mileage 36.00
	Sub Total
	Tax
	Total 916.00

Remarks: Float Hold!

TOTAL 5237.50
Disc 1047.50
4190.00

Floating Equipment	1-4 1/2 - Bride Shoe - 109.00
	1-Insert - 169.00
	1-Cent - 172.00
	2-Baskets - 226.00
	1-Arrow Stage Collar - 1890.00
	\$ 2516.00

PICKRELL DRILLING COMPANY, INC.

100 SOUTH MAIN - SUITE 505
WICHITA, KANSAS 67202-3738
(316) 262-8427 • FAX (316) 262-0893

July 3, 2008

King SWDW
150' S of C N/2 NW/4 Sec. 7-21S-24W
Hodgeman County, Kansas
(API #15-083-21347-0001)
Docket No. D-26615


Kansas Corporation Commission
Conservation Division
130 S. Market, Room #2078
Wichita, Kansas 67202

Gentlemen:

Enclosed herewith please find our Well Plugging Application for the captioned well. We are including District #1 for a copy of the Application so that they will have it readily available.

Yours very truly,

PICKRELL DRILLING COMPANY, INC.


Jack Gurley

cc w/ encls.: KCC District No. 1
210 E. Front View, Suite A
Dodge City, Kansas 67801

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 07 2008

CONSERVATION DIVISION
WICHITA, KS



KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Thomas E. Wright, Chairman Michael C. Moffet, Commissioner Joseph F. Harkins, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

PICKRELL DRILLING COMPANY, INC.
100 S MAIN STE 505
WICHITA, KS 67202-3738

July 14, 2008

Re: KING #1
API 15-083-21347-00-01
7-21S-24W, 4518 FSL 4002 FEL
HODGEMAN COUNTY, KANSAS


Dear Operator:

This letter is to notify you that the Conservation Division has received your plugging proposal, form CP-1, for the above well and has reviewed the proposal for completeness. The central office will now forward your CP-1 to the district office listed below for review of the proposed plugging method. **Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit in accordance with K.A.R. 82-3-600.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. This notice in no way constitutes authorization to plug the above well by persons not having legal rights of ownership or interest in the well.

This notice is void after January 10, 2009. The CP-1 filing does not bring the above well into compliance with K.A.R. 82-3-111 with regard to the Commission's temporary abandonment requirements.

Sincerely,



Steve Bond

Production Department Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

CONSERVATION DIVISION

Finney State Office Building, 130 S. Market, Room 2078, Wichita, KS 67202-3802
(316) 337-6200 • Fax (316) 337-6211 • <http://kcc.ks.gov/>