

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21044-00-00

Spot: ~~NENWSWNW~~
SWSWNWNW

Sec/Twnshp/Rge: 8-27S-12W

3984 ~~3930~~ feet from S Section Line, 360 feet from W Section Line

Lease Name: POLLOCK TWIN

Well #: 2

County: PRATT

Total Vertical Depth: 2870 feet

Operator License No.: 31980

Op Name: LOTUS OPERATING COMPANY, L.L.C.

Address: 100 S MAIN STE 420
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2730		WITH 2 SX CMT
PROD	4.5	2868	2294	WITH 100 SX CMT 93.28
SURF	8.625	471		WITH 350 SX CMT

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 07/10/2008 2:30 PM

Plug Co. License No.: 7407

Plug Co. Name: EAGLE WELL SERVICE DBA BRONCO ENERGY SERVICES

Proposal Rcvd. from: ROBIN BROWN

Company: LOTUS OPERATING

Phone: (620) 546-4801

Proposed Plugging Method: CIBP @ 2730' WITH 2 SX CMT. PLUG AT 1000' WITH 12 SX GEL & 50 SX CMT. PLUG AT 500' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 07/11/2008 11:45 AM

KCC Agent: STEVE PFEIFER

Actual Plugging Report:

Perfs:

SET CIBP @ 2730' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. 1ST PLUG AT 1000' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 500' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. NO RETURNS ON 3RD PLUG. CMT FALLING BACK. SHUT DOWN. LET CMT SET. TAG CMT IN MORNING. 7/11/08: RUN TBG & TAG TOC @ 240'. RAN TBG TO 60'. CIRCULATED CMT TO SURFACE WITH 20 SX CMT.

INVOICED

DATE 8-6-08
INV. NO. 2009060201

RECEIVED
KANSAS CORPORATION COMMISSION


JUL 28 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

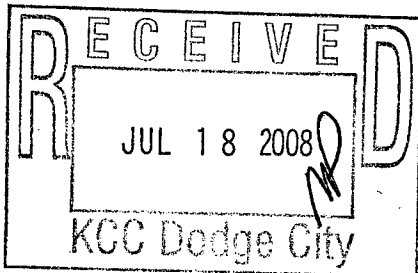

Signed

Stephen J Pfeifer
(TECHNICIAN)