

15-065-00856-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

Graham County. Sec. 32 Twp. 10S Rge. (E) 23 (W)

NORTH R23W

Location as "NE/CNW/SW" or footage from lines NE SE NE  
Lease Owner Stanolind Oil and Gas Company  
Lease Name Guy Dorman Well No. 1  
Office Address Box 1654 Oklahoma City, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed February 6, 19 56  
Application for plugging filed Verbal 2-6-56; written 2-7-56 XXXXXX  
Application for plugging approved Verbal February 6, 19 56  
Plugging commenced February 6, 19 56  
Plugging completed February 6, 19 56  
Reason for abandonment of well or producing formation Dry hole drilled.

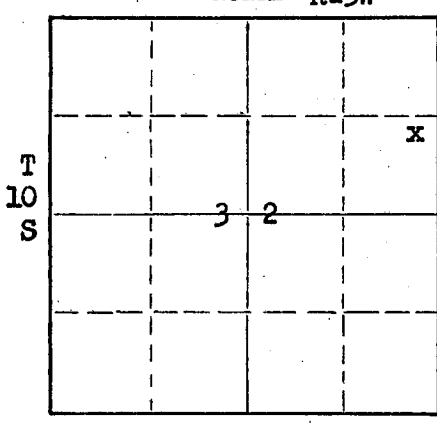

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4210 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Total depth 4210'. Heavy mud from 4210' to 200'; set plug, 1/2 sack hulls on top of No. 1 plug; pump 15 sacks cement to 152'; mud to 40'; set No. 2 plug, 1/2 sack hulls on top of No. 2 plug and dumped 10 sacks cement to bottom of cellar.


RECEIVED  
2-9-56  
FEB 9 1956  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Iron Drilling Co.  
Address 1206 Philtower Bldg., Tulsa, Okla.

STATE OF Kansas, COUNTY OF Ellis, ss.  
Ralph Ludwick (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Ralph Ludwick Field Supt.  
Drawer 389 Hays, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of February, 19 56  
My commission expires April 27, 1959  
Lucille Burger Notary Public.

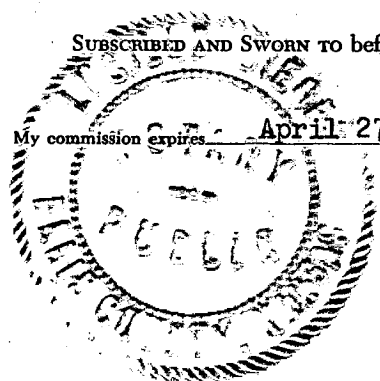

PLUGGING  
FILE SEC 32 T 10 R 23 W  
BOOK PAGE 37 LINE 19



FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Top soil and post rock	0	30			
Clay and gravel	30	60			
Blue shale	60	207			
Shale and sand	207	550			
Shale and shells	550	1315			
Sand and shale	1315	1580			
Red bed	1580	1765			
Shale and red bed	1765	1895			
Argillite	1895	1930			
Shale and shells	1930	2175			
Shale and lime streaks	2175	2550			
Lime and shale	2550	3191			
Lime	3191	3551			
Lime and shale	3551	3637			
Lime	3637	3816			
Lime and shale	3816	3998			
Lime cherty	3998	4024			
Lime and shale	4024	4103			
Conglomerate	4103	4180			
Archiele	4180	4210			
Total Depth	4210				

Operations commenced: 1-21-56  
 Date Spudded: 1-21-56  
 Date Completed: 2-6-56

DST #1 3004-38'. Tool open one hr. Closed 20 min.  
 Rec 20' drlg mud. 15. Initial pressure  
 zero. IFF zero. FIF zero. HIFST zero.

Well plugged 2-6-56.