

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

RECEIVED
STATE CORPORATION COMMISSION

JUL 2 1974

WELL PLUGGING RECORD

Give All Information Completely.
Make Required Affidavit.
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

CONSERVATION DIVISION
Wichita, Kansas

Location as "NE/CNW/SW" or footage from lines SE SE NW County. Sec. 34 Twp. 10 Rgs. 23 (E) W (W)

Lease Owner Dreiling Oil, Inc.

Lease Name Robinson Well No. 2

Office Address Rt. #2, Victoria, KS 67671

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed July 8 19 72

Application for plugging filed March 16 19 74

Application for plugging approved March 18 19 74


Plugging commenced June 18 19 74

Plugging completed June 19 74

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production January 20, 19 74

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

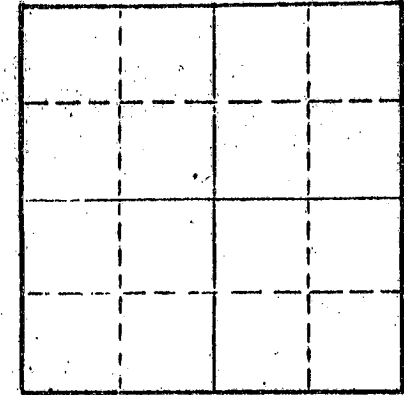

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, KS

Producing formation Kansas City Depth to top _____ Bottom _____ Total Depth of Well 3,839 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Casing	0'	159'	8 5/8"	159'	0
	Casing	0'	3,839'	4 1/2"	3,839'	3,003'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped plug down 8 5/8" casing with 2 sacks hulls, 20 sacks gel, 1 sack hulls, 70 sacks cement, 10 sacks gel, 50 sacks cement.
Maximum pressure 250#. Shut in pressure 100#.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dreiling Oil, Inc.
Address Rt. #2, Victoria, KS 67671

STATE OF Kansas COUNTY OF Ellis, ss.

Joe Hess, Sec.-Treas. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Joe Hess, R.R. #2 Victoria, KS 67671
(Address)

Subscribed and sworn to before me this 25th day of June, 19 74



Cecilia Basgall
Cecilia Basgall Notary Public.

DREILING OIL, INC.

Victoria, Kansas 67671

15-065-20553-00-00

Dreiling Oil, Inc.

WELL LOG

Company	Victoria, Kansas 67671	Sec. 34	Twp. 10	Rng. 23
Farm	Robinson No. 2	Location	440 F F L of NW/4	
Total Depth	3,840'	County	Graham	
Comm.	7-1-72	Comp.	7-8-72	Elevation: 2326
Contractor	Dreiling Oil, Inc.			K. B.
	Victoria, Kansas 67671			2323
				D. F.
				2321
				G. R.

Casing Record
 159' - 8 5/8"
 3,839' - 4 1/2"

Cement Record
 125 sacks cement
 cemented w/50 sacks of
 50/50 Poz Mix - 27 Gal &
 12 Gilsnite per sk. & 100
 Common 12% salt

Production:

Figures Indicate Bottom of Formations

0'	75'	Top Soil & Clay
75'	1350'	Shale
1350'	1532'	Sand
1532'	1710'	Red Bed & Shale
1710'	1831'	Red Bed & Shale
1831'	1871'	Anhydrite
1871'	2340'	Shale
2340'	2615'	Shale & Lime
2615'	2760'	Lime
2760'	3202'	Shale & Lime
3202'	3840'	Lime
3840'	T.D.	

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 2 1972
 CONSERVATION DIVISION
 Wichita, Kansas


STATE OF KANSAS(
)
 COUNTY OF ELLIS)

I, Joe Hess, Secretary Treasurer, of Dreiling Oil, Inc. upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Robinson #2.

Joe Hess
 JOE HESS

Subscribed and sworn to before me this 11th day of July, 1972.

Patty Rohr
 PATTY ROHR NOTARY PUBLIC



My commission expires: July 20, 1975.