


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

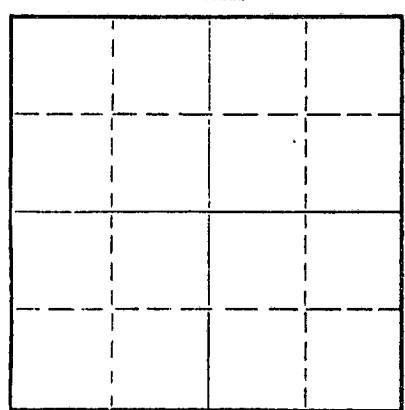

Locate well correctly on above
Section Plat

Graham County. Sec. 34 Twp. 10 Rge. 23 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NW NE NW
Lease Owner Dreiling Oil, Inc.
Lease Name Robinson Well No. 1
Office Address Rt. #2, Victoria, Kansas 67671
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1-10- 19 69
Application for plugging filed 2-19 19 73
Application for plugging approved 2-22 19 73
Plugging commenced 2-28 19 73
Plugging completed 2-28 19 73
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production January 11, 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,845 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Casing				4 1/2"	3844'	2518'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 5 sacks Halls, 13 Gel, 110 cu. ft. cement, 9 Gel, Released plug, mixed 30 cement, 3 Gel, 10 cu. ft. cement. Shut In - 200#, Input 500#


RECEIVED
STATE CORPORATION COMMISSION
MAR 9 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Dreiling Oil, Inc. & Russ Casing & Pulling, Inc.
Address Rt. #2, Victoria, Ks. 67671 Box 1082, Great Bend, Ks. 67530

STATE OF KANSAS, COUNTY OF ELLIS, ss.
I, Joe Hess, Sec. Treas. of Drlg. Contrc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
JOE HESS, Rt. #2, Victoria, Kansas 67671
(Address)

Subscribed and sworn to before me this 7 day of March, 19 73
Cecilia Basgall
CECILIA BASGALL Notary Public.
My commission expires September 13, 1976



L. J. DREILING AND SONS, INC.

Victoria, Kansas 67671

15-065-20195-00-00

WELL LOG

Company	Leo J. Dreiling Oil Company Route 2 Victoria, Kansas 67671	Sec. 34	Twp. 10	Rng. 23
Farm	Robinson No. 1	Location	NW NE NW	
Total Depth	3845'	County	Graham	
Comm.	1-3-69	Comp.	1-10-69	Elevation: 2333' K. B.
Contractor	L. J. Dreiling & Sons, Inc. Victoria, Kansas 67671		2330'	D. F.
			2328'	G. R.
		Casing Record	Cement Record	Production:
	185' - 8 5/8"		125 sacks cement	
	3844' - 4 1/2"		175 sacks 50/50 pozmix	
			2% gel, 10% salt, 1% CC & 7#	
			Friction Reducer	

Figures Indicate Bottom of Formations

0'	50'	Surface Clay
50'	140'	Hard Sand & Shale
140'	187'	Blue Shale
187'	1390'	Shale
1390'	1485'	Sand
1485'	1814'	Shale & Sand
1814'	1835'	Shale
1835'	1880'	Anhy.
1880'	2405'	Shale & Shells
2405'	2560'	Shale & Lime
2560'	2710'	Lime
2710'	3610'	Shale & Lime
3610'	3845'	Lime
3845'	T.D.	

RECEIVED
STATE CORPORATION COMMISSION
FEB 22 1973
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Robinson #1.

Leo F. Dreiling

LEO F. DREILING

Subscribed and sworn to before me this 13th day of January 1969.

JAN 13 1969
NOTARY
PUBLIC
ELLIS COUNTY, KANSAS

Joseph A. Hess

JOSEPH A. HESS NOTARY PUBLIC

My commission expires: September 19, 1970