

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER Drilled in 1955

LEASE NAME Diebolt LKC Unit

WELL NUMBER 10-4

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

2970 Ft. from S Section Line

990 Ft. from E Section Line

SEC. 29 TWP. 10 RGE. 23 (X) or (W)

COUNTY Graham

LEASE OPERATOR Geneva Resources, Inc.

ADDRESS 50 California St., Ste. 930, San Francisco, CA 94111

PHONE# (415) 291-9500 OPERATORS LICENSE NO. 30241

Date Well Completed 11/18/55

Character of Well Input

Plugging Commenced 03/26/91

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 03/26/91

The plugging proposal was approved on March 26, 1991 (date)

by Carl Goodrow (KCC District Agent's Name).

Is ACO-1 filed? Unknown If not, is well log attached? Yes

Producing Formation LKC Depth to Top 3648' Bottom 3890' T.D. 3940'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
<u>LKC</u>	<u>Oil</u>	<u>Surface</u>	<u>210</u>	<u>8-5/8"</u>	<u>210'</u>	<u>None</u>
		<u>Surface</u>	<u>3967</u>	<u>5-1/2"</u>	<u>3967'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set. Squeezed 5-1/2" casing with 335 sx of cement blend to a maximum pressure of 1000 psi. Blend consists of 65/35 pozmix containing 10% gel and 500 lbs. of hulls. Squeeze 8-5/8" casing with 15 sx of cement blend to a maximum pressure of 250 psi.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Halliburton Services

Address P. O. Box 428, Hays, KS 67601

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Geneva Resources, Inc.

STATE OF California COUNTY OF San Francisco

Thomas G. Smith

(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Thomas G. Smith

(Address) 50 California Street, Suite 930

San Francisco, CA 94111

SUBSCRIBED AND SWORN TO before me this 1st day of May, 19 91

OFFICIAL NOTARY SEAL

JULIA A. SCHNEIDER


Notary Public — California Commission Expires: March 28, 1995

SAN FRANCISCO COUNTY

My Comm. Expires MAR 28, 1995

Notary Public

DIEBOLT LKC UNIT #10-4

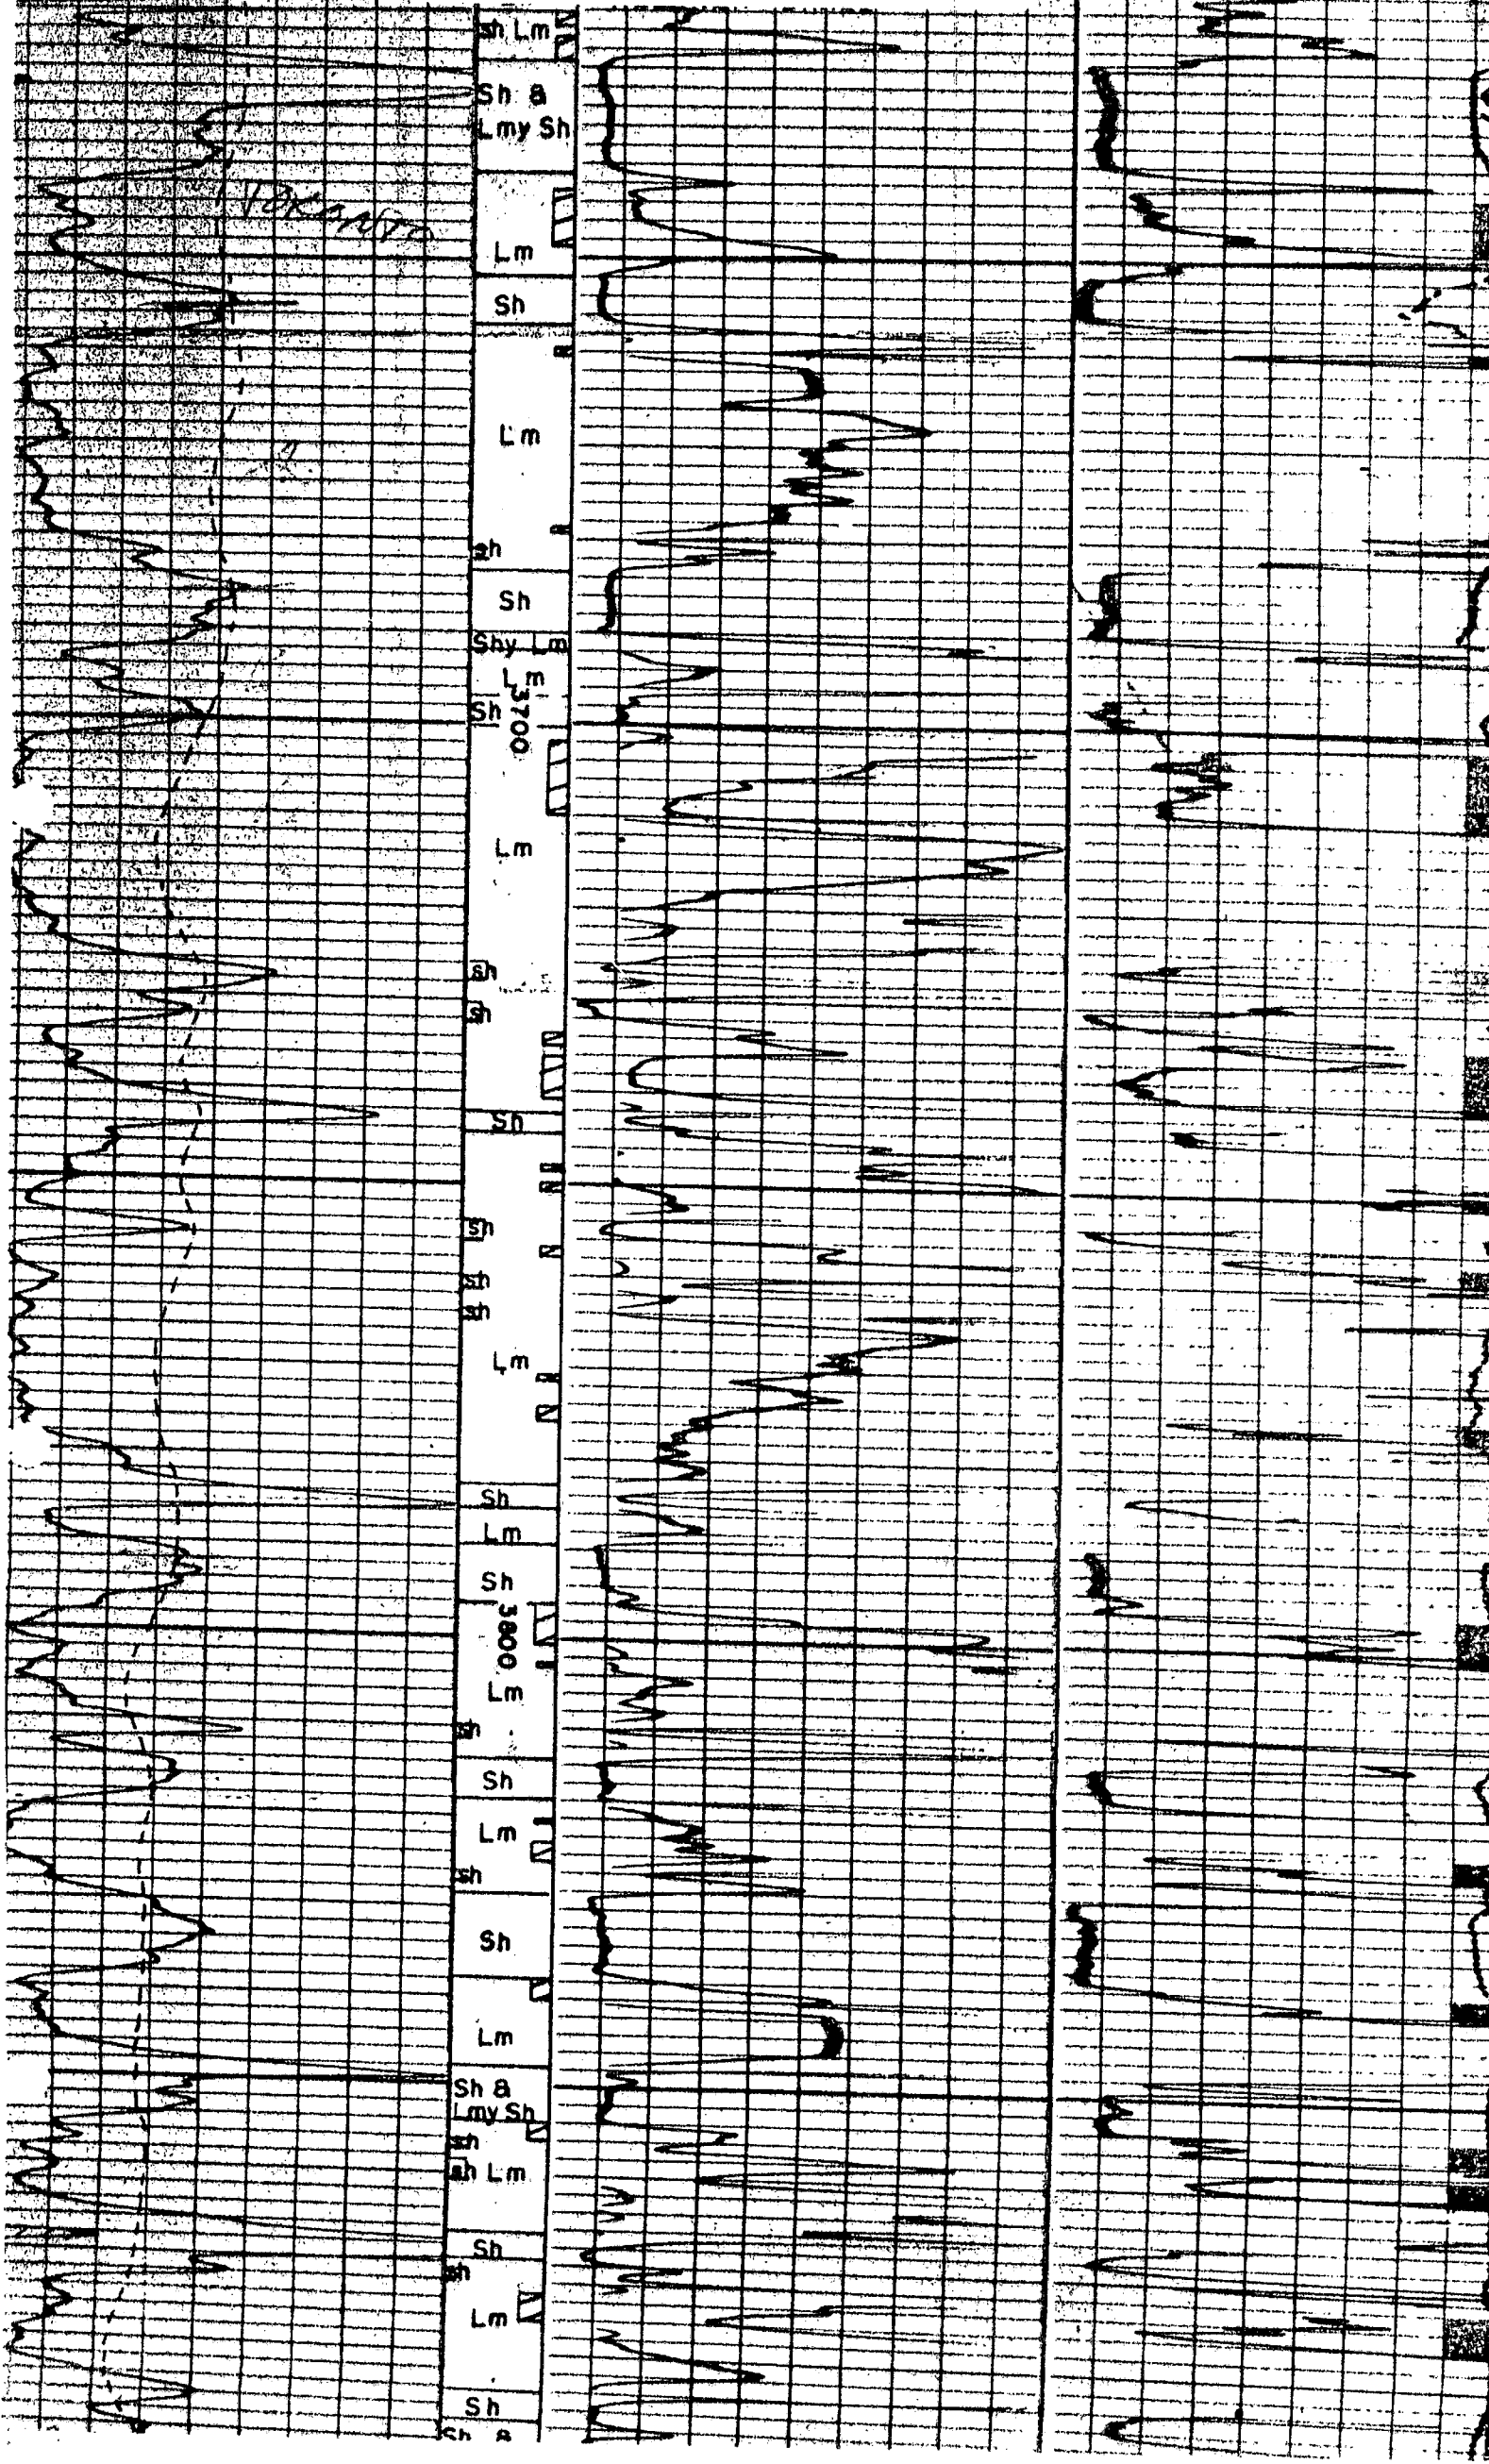

DIEBOLT LKC Unit #104

Sh Lm

Sh &
Lmy Sh

Lm

Sh

Lm

Sh

Sh

Shy Lm

Lm

Sh

0000

Lm

Sh

Sh

Sh

Sh

Sh

Sh

Lm

Sh

Lm

Sh

0000

Lm

Sh

Lm

Sh

Sh

Lm

Sh &

Lmy Sh

Sh

Sh Lm

Sh

Sh

Lm

Sh

RECEIVED
STATE CORPORATION COMMISSION

MAY 10 1991

CORPORATION DIVISION
Wichita, Kansas