


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

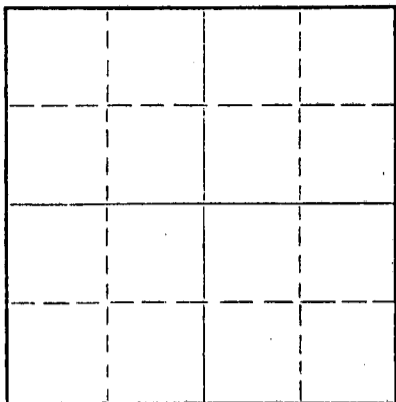

Locate well correctly on above
Section Plat

Sedgwick County. Sec. 16 Twp. 28 Rge. 2 (E) e (W)
Location as "NE/CNW%SW%" or footage from lines NW SE NW
Lease Owner K. T. Wiedemann
Lease Name Tankar Well No. 1
Office Address 1515 W. Sixth, El Dorado, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed December 29 1959
Application for plugging filed " 19
Application for plugging approved " 19
Plugging commenced " 19
Plugging completed " 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3052 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	91	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Fluid to 220'
1/3 sack hulls
Set plug w/45 sacks cement
Fluid to 35'
1/3 sack hulls
Set plug w/10 sx cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Beaumont Petroleum Company
Address Box 285, El Dorado, Kansas

STATE OF KANSAS, COUNTY OF BUTLER, ss.
C. D. Dunbar (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. D. Dunbar
El Dorado, Kansas
(Address)



SUBSCRIBED AND SWORN to before me this 13 day of January, 1960

RECEIVED
STATE CORPORATION COMMISSION
Roberta Cottle
Notary Public.

JAN 14 1960
1-14-60
CONSERVATION DIVISION
Wichita, Kansas

R
—

#1 TANKAR

Rot. T.D. 3052
Comm. Rot. 12-21-59
Comp. Rot. 12-31-59

Cemented
8 5/8 Surface w/100 sx
Halliburton O.W.C. Co.

NW SE NW
Sec. 16-28-2e
Sedgwick Co. Kans

Casing Record
8 5/8 91

FIGURES INDICATE BOTTOM OF FORMATIONS
ROTARY BUSHING 5' ABOVE GROUND LEVEL

cellar	5	
soil	12	
sandy lime	25	
lime-shale	940	
shale-lime strks	2510	
shale	2512	
lime	2715	
shale-lime	2845	
shale	2885	
sand	2898	
shale	2965	
congl.	2971	
lime - Miss.	3052	Rot. T.D.

12-29-59
Plugged & Abandoned