


RECEIVED
STATE CORPORATION COMMISSION
4-30-75
APR 30 1975
FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD
CONSERVATION DIVISION
Wichita, Kansas

BUTLER County. Sec. 2 Twp. 26S Rge. 3E (E) (W)
Location as "NE/CNW/SE" or footage from lines SW SE SE
Lease Owner OILFIELD SUPPLY & TRADING INC.
Lease Name Siders Well No. 1
Office Address 430 Greenwood, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed 4-1-75 19
Application for plugging approved 4-2-75 19
Plugging commenced 4-5-75 19
Plugging completed 4-11-75 19
Reason for abandonment of well or producing formation depleted

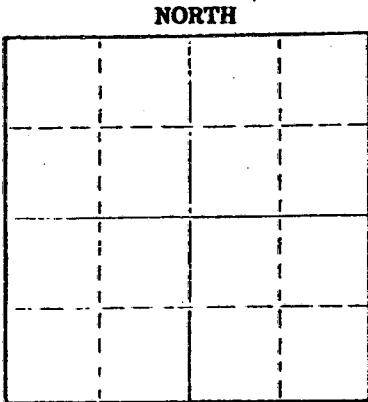

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ted E. Dewey
Producing formation Mississippian Depth to top Bottom Total Depth of Well 2747 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	2740	2289

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUG HOLE WITH ROCK BRIDGE FROM 215-200'
20 SAX CEMENT MUD AND DIRT TO 40 FEET 10 SAX CEMENT.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor DUNBAR DRILLING INC.
Address 5252 North Broadway Wichita, Kansas 67219


STATE OF Kansas COUNTY OF Sedgwick ss.

W. P. Simmons (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. Simmons
5252 North Brdwy. Wichita, Kansas 67219
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of April 19 75

My commission expires November 19, 1977
Frances J. Simmons Notary Public.



TRIANGLE DRILLING

324 North Orchard
EL DORADO, KANSAS

To Oil Field Supply & Trading Inc.

Invoice No. _____

430 Greenwood

Date May 9, 1970

Wichita, Kansas

For Month Of _____

Lease Siders # 1 SW SE SE

WELL LOG

● -----	71 Sand, Shale and Lime
71 -----	172 Lime and Shale
172 -----	355 Lime
355 -----	635 Lime and Shale
635 -----	1432 Shale and Lime
1432 -----	1757 Lime and Shale
1757 -----	1930 Shale and Sand
1930 -----	2120 Lime and Shale
2120 -----	2346 Shale and Lime
2346 -----	2525 Lime
2525 -----	2742 Lime and Shale
2742 -----	2747 Lime Miss. R.T.D.

RECEIVED
STATE CORPORATION COMMISSION

CONSERVATION DIVISION
Wichita, K-1225