


15-163-20227-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

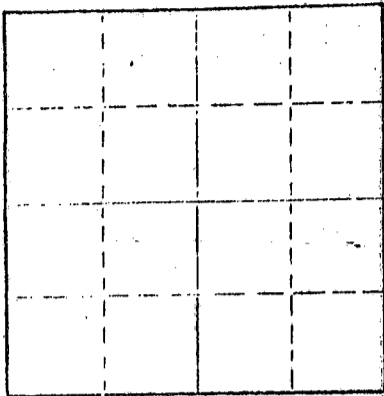

Locate well correctly on above Section Plat

Rooks County, Sec. 1 Twp. 10 Rge. 17 (E) (W)
 Location as "NE/CNW/SW4" or footage from lines SE SE NE NW
 Lease Owner Lehen Oil Corporation
 Lease Name Klim #3 Well No.
 Office Address Great Bend, Kansas 67530
 Character of Well (completed as Oil, Gas or Dry Hole)
 Date well completed 19____
 Application for plugging filed 19____
 Application for plugging approved 19____
 Plugging commenced 10/14/74 19____
 Plugging completed 10/18/74 19____
 Reason for abandonment of well or producing formation depleted.
 If a producing well is abandoned, date of last production 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3530 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	209	none
				5 1/2"	3559	2299'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, pushed plug to 3000' with sand and 4 sacks cement. Shot pipe at 2303', pulled 73 joints. Plugged well with 120 sacks cement, 28 sacks gel and 3 sacks hulls.

PLUGGING COMPLETE.

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 5 1974
 CONSERVATION DIVISION
 Wichita, Kansas

11-5-74

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet)
 KHELSON CASIN G PULLING
 CHASE, KANSAS
 Address _____

STATE OF KANSAS COUNTY OF RICE, ss.
 R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
 CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of October, 1974

Margaret Melcher
 Notary Public.

My commission expires _____
 MARGARET MELCHER
 NOTARY PUBLIC
 Rice County, Kansas
 My Commission Expires
 Feb. 15, 1975



15-163-20227-0000

RESIDENCE
564 N. ARMOUR DRIVE
MU 3-0787

ROBERT C. ARMSTRONG
PETROLEUM GEOLOGIST
WICHITA, KANSAS

OFFICE
655 FOURTH NAT'L BLDG.
AM 5-5608

July 7, 1969

TILCO #3 KLIM
SE SE ~~KE~~ Sec. 1-10S-17W
Rooks County, Kansas

GENERAL

Contractor: Leben Drilling Co.
Spudded: June 28, 1969
Completed: July 5, 1969
Rotary: Surface to 3561', TD

RECEIVED
STATE CORPORATION COMMISSION

OCT 17 1974

CASING

8 5/8" cemented at 209'/150 sacks
5 1/2" cemented at 3559'/150 sacks

CONSERVATION DIVISION
Wichita, Kansas

16-17-74

GEOLOGICAL DATA

Samples saved, drilling-time recorded from 2800' to the total depth.

Elevation: 2045 rotary bushing, 2042 derrick floor. Rotary bushing elevation and measurements used.

Formation tops

Anhydrite	1262	+ 783
Base Anhydrite	1300	+ 745
Topeka	2938	- 893
Heebner	3165	-1120
Toronto	3184	-1139
Lansing KC	3205	-1160
Base KC	3428	-1383
Marmaton Sand	3442	-1397
Arbuckle	3555	-1510
Total Depth	3561	-1516

DRILL STEM TESTS

DST #1

3170 - 3199

(Toronto) Open 1 hour, recovered 30' heavily oil cut mud. 560# IBHP, 29# IFP, 52# FFP, 112 BHP/30 min.