

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-163-23,018-00-00

LEASE NAME Post

WELL NUMBER 1

330 Ft. from S Section Line

1650 Ft. from E Section Line

SEC. 8 TWP. 10S RGE. 16 (E) or (W)

COUNTY Rooks

Date Well Completed 11/4/88

Plugging Commenced 11/4/88

Plugging Completed 11/4/88

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Black Petroleum Company

ADDRESS P. O. Box 12922, Wichita, KS 67277

PHONE# (316) -942-2741 OPERATORS LICENSE NO. 5068

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC District Office prior to plugging this well? Yes

Which KCC Office did you notify? District #4

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation Depth to Top Bottom T.D. 3491'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS SECTION

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	269'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 3491'-3480' 40 sks cement @ 310'

25 sks cement @ 3480' 10 sks cement @ 40'

25 sks cement @ 1120' 15 sks cement in rathole

100 sks cement @ 635'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, Kansas 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum

(Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature)


Kyle B. Branum

(Address) P.O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 88

Glenda R. Tiffin, Notary Public

Expires: February 6, 1992



EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Black Petroleum Company
P. O. Box 12922
Wichita, Kansas 67277

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Post

WELL #1

LOCATION: SE SW SE
Section 8-10S-16W
Rooks County, Kansas

ROTARY TOTAL DEPTH: 3491'

ELEVATION: 1936' K.B.

COMMENCED: 10/28/88

COMPLETED: 11/4/88

CASING: 8-5/8" @ 269' w/175 sks cement

STATUS: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Sand & Clay	69'	Shale & Lime Stks.	2925'
Blue Shale	519'	Top of Topeka	2926'
Dakota Sand	615'	Top of Heebner	3058'
Red Bed	740'	Top of Toronto	3074'
Cedar Hills Sand	815'	Top of Lansing-Kansas City	3098'
Red Bed	1120'	Top of Arbuckle	3478'
Anhydrite	1150'	R.T.D.	3491'
Red Bed	1500'		


RECEIVED
STATE CORPORATION COMMISSION

NOV 9 1988

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


CONSERVATION DIVISION
Wichita, Kansas


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

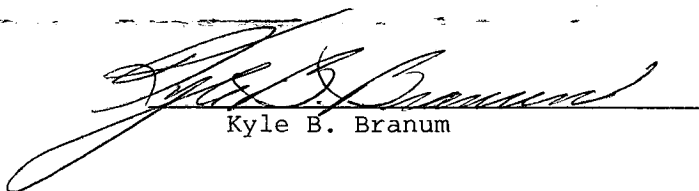
Kyle B. Branum

Subscribed and sworn to before me on November 8, 1988.

My commission expires: February 6, 1992.




Glenda R. Tiffin, Notary Public