

7-11-08

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-20789-00-01 02 kccap3
Spot: NESWNE Sec/Twnshp/Rge: 35-29S-13W
3721 feet from S Section Line, 1692 feet from E Section Line
Lease Name: HUMBLE Well #: 1
County: PRATT Total Vertical Depth: 4658 feet

Operator License No.: 31925
Op Name: QUALITY WELL SERVICE, INC.
Address: 190 US HWY 56
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4658	2640	WITH 300 SX CMT
SURF	13.38	195		WITH 225 SX CMT

151.39

Well Type: Oil UIC Docket No: D22523.0 Date/Time to Plug: 05/21/2008 2:15 PM
Plug Co: License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: QUALITY WELL SERVICE Company: DAVID BRADY Phone: (620) 727-3410

Proposed Plugging Method: SAND TO 4010' & 5 SX CMT. PLUG AT 850' WITH GEL & 50 SX CMT. PLUG AT 230' WITH 75 SX CMT. PLUG AT 40' WITH 30 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/21/2008 4:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4010' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 850' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 230' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 30 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4096	4098		

INVOICED

DATE 7-3-08
INV. NO. 2009060032

RECEIVED
KANSAS CORPORATION COMMISSION


JUN 09 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

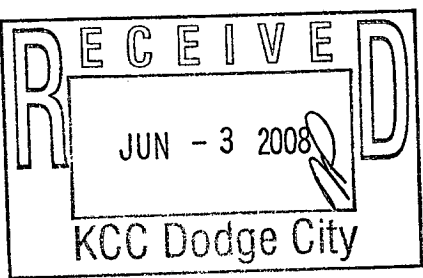

Signed Stephen J. Pfeifer
(TECHNICIAN)

Form CP 2/3
[Signature]