

9

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD


Butler County, Sec. 4 Twp. 26ge. 3 (E) E (W)

Location as "NE/CNWxSWx" or footage from lines SW SW SW  
Lease Owner K. T. Wiedemann Estate  
Lease Name Gertrude Rombold Well No. 1  
Office Address 1515 W. Sixth, El Dorado, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 6-30-49 19  
Application for plugging filed 7-2-62 19  
Application for plugging approved 7-2-62 19  
Plugging commenced 7-2-62 19  
Plugging completed 7-2-62 19

Reason for abandonment of well or producing formation  
After Halliburton Jel-Water treatment fluid all water.

If a producing well is abandoned, date of last production June, 1961 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

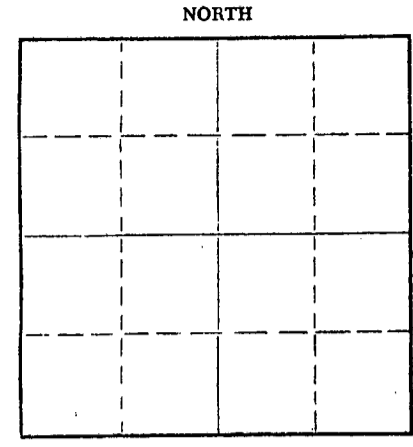

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Corckery  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2767 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	75	
				5 1/2	2767	2652

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with rock from 2767 to 2762  
Dumped 5 sacks cement on top rock  
Heavy mud to 225'  
Set rock bridge to 215'  
Dumped 12 sx cement on top rock bridge  
Heavy mud to 35'  
Dumped 8 sx cement to surface

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 5 1962  
7-5-62  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor K. T. Wiedemann Estate  
Address 1515 W. Sixth, El Dorado, Kansas


STATE OF KANSAS, COUNTY OF BUTLER, ss.  
C. D. Dunbar (employee of owner) or (~~owner~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) C. D. Dunbar  
El Dorado, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3 day of July 1962

My commission expires 3-21-64



K. T. WIEDEMANN ESTATE

#1 Gertrude Rombold

SW SW SW  
Sec. 4-26-3e  
Butler County

T.D. 2767  
Comm. Rot. 6-18-49  
Comp. Rot. 6-30-49

Cemented  
5 1/2" Oil String w/25 sx

Cable Tools  
Completed 8-11-49

Casing Record  
8 5/8 75  
5 1/2 2762 recovered 2652'

FIGURES INDICATE BOTTOM OF FORMATIONS  
ROTARY BUSHING 5' FROM GROUND LEVEL

cement	80
shale-shells	170
lime	220
shale-shells	300
lime-shale brks	450
shale-shells	885
shale	1200
sand	1250
shale	1395
shale sandy	1469
broken lime	1502
lime-shale brks	1760
lime-sandy	1774
lime	1836
shale	1900
shale-lime strks	2020
lime-shale	2080
sdylime	2104
lime	2250
lime-shale	2305
shale	2315
lime	2600
shale	2625
lime-shale	2650
shale-lime strks	2690
shale	2763
Miss. lime	2767 T.D.

STATE OF OHIO  
DEPARTMENT OF REVENUE

STATE OF OHIO  
DEPARTMENT OF REVENUE

July 3, 1962-  
Plugged & Abandoned