


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Butler County, Sec. 4 Twp. 26 Rge. 3 (E) E (W)
Location as "NE/CNW/SW" or footage from lines. NW Corner
Lease Owner K. T. Wiedemann Estate - formerly Beaumont Petroleum Co.
Lease Name Chas. Zuercher Well No. 1
Office Address 1515 W. Sixth, El Dorado, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 29, 19 57
Application for plugging filed May 17, 19 61
Application for plugging approved " 19
Plugging commenced " 19
Plugging completed May 25, 19 61
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

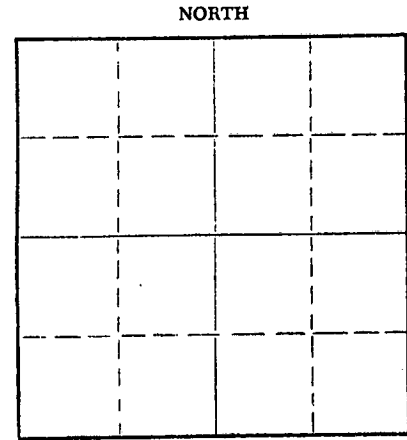

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Lee Guthrie
Producing formation Depth to top Bottom Total Depth of Well 3300 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	108	
				7"	3237	2483

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with cement to 2700
Dumped 5 sacks cement on top.
Rock Bridge @ 2700
Heavy mud to 180 ft.
Rock bridge to 160 ft w/30 sx cement
Heavy mud to 25'
Rock bridge to 20' w/ 10 sx cement

RECEIVED
STATE CORPORATION COMMISSION
5-31-61
MAY 31 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor ~~XXXXXXXXXX~~ K. T. Wiedemann Estate Plugging No. #477
Address Box 1276, El Dorado, Kansas

STATE OF KANSAS, COUNTY OF BUTLER, ss.

C. D. Dunbar (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *C. D. Dunbar*
El Dorado, Kansas
(Address)


Subscribed and Sworn to before me this 29 day of May, 19 61

My commission expires 3-21-64

Roberta Cottle
Notary Public.

INVOICED

DATE 6-30-61
INV. NO. 3873-E



BEAUMONT PETROLEUM COMPANY

#1 CHAS. ZUERCHER

Rot. T.D. 3300
 Comm. Rot. 7-13-57
 Comp. Rot. 7-20-57

NW Corner
 Sec. 1-26-3E
 Butler County

Cemented
 10 3/4 Surface w/85
 7" Oil String w/125 sx
 Liberty OWC Co.

Cable Tool TD 3227 1/2
 Comm. C.T. 7-23-57
 Comp. C.T. 8-1-57

Casing Record

10 3/4 108'
 7" 2327' used 20# snlss csg.

FIGURES INDICATE BOTTOM OF FORMATIONS
 ROTARY BUSHING 5'6 ABOVE GROUND LEVEL

cellar	5
soil	30
sand & gravel	40
lime-shale	108
lime	680
shale-lime strks	1100
shale	1110
lime-shale brks	1780
shale	1980
lime	2155
shale-lime	2288
lime	2460
shale	2553
lime	2580
lime-shale	2730
lime	3048
shale-lime	3090
lime-shale	3134
lime	3195
shale-lime	3234
lime	3300 Rot. T.D.
lime	Cable Tool 3227 1/2 Effective TD

FORMATIONS:

T. K.C. ls	2288
B. K.C. ls	2450
T. Marm. ls	2520
T. Cher. sh	2674 ?
T. Miss Ont	2728
T. Miss. Dol.	2736
DST #1	2729-2737
T. Miss. ls.	2776
T. Kind. sh.	2049
T. Viola dol.	3109
T. Simpson ss	3172
T. Arb. dol.	3234

RECEIVED
 STATE CORPORATION COMMISSION

MAY 31 1961

CONSERVATION DIVISION
 Wichita, Kansas