

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20784-00-00
Spot: NESESW Sec/Twnshp/Rge: 25-29S-40W
990 feet from S Section Line, 2300 feet from W Section Line
Lease Name: FREDERICK YARDLEY Well #: 1-25
County: STANTON Total Vertical Depth: 5778 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2880		WITH 2 SX CMT
CIBP		4000		WITH 2 SX CMT
CIBP		4950		
PROD	5.5	5765	0	WITH 700 SX CMT
SURF	8.625	1716		WITH 735 SX CMT

#187.79

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/04/2008 11:00 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: STEVE RIDENOUR Company: PRESCO WESTERN Phone: (620) 655-3459

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 08/04/2008 4:00 PM KCC Agent: JACK MACCLASKEY

Actual Plugging Report:

CIBP @ 4000' WITH 2 SX CMT. CIBP @ 2880' WITH 2 SX CMT. PRESSURE TESTED 5 1/2" CASING TO 500 PSI & HELD. PLUG AT 1740' WITH 50 SX CMT. CIRCULATED CMT TO SURFACE AT 660' WITH 150 SX CMT. TIED ONTO ANNULUS AND PUMPED INTO. ANNULUS WAS FULL.

Perfs:

Top	Bot	Thru	Comments
5620	5630		

RECEIVED
KANSAS CORPORATION COMMISSION
AUG 25 2008
CONSERVATION DIVISION
WICHITA, KS


INVOICED

DATE 09/16/08
INV. NO. 2009060378

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY

Plugged through: TBG

District: 01

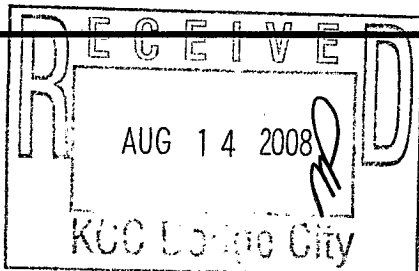

Signed

Jack MacClaskey
(TECHNICIAN)