

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-083-21364-00-00
Spot: SWNESW Sec/Twnshp/Rge: 1-21S-24W
1650 feet from S Section Line, 3630 feet from E Section Line
Lease Name: MCCREIGHT Well #: 2
County: HODGEMAN Total Vertical Depth: 4460 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: 8100 E 22ND ST N # 700 BOX 783188
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4350		WITH 2 SX CMT
PC		1490		WITH 200 SX CMT
PROD	5.5	4458	0	WITH 100 SX CMT
SURF	8.625	205		WITH 145 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/06/2008 8:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: BENNIE DILLS Company: RITCHIE EXPLORATION Phone: (620) 793-2525

Proposed Plugging Method: SET CIBP @ 4330' & 2 SX CMT. RUN TBG TO 1500' & CIRCULATE CMT TO SURFACE. PULL TBG & TOP OFF. TIE ONTO BACKSIDE & PUMP 50 SX CMT.

Plugging Proposal Received By: JACK MACLASKEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 08/06/2008 11:30 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

SET CIBP @ 4350' & 2 SX CMT. RUN TBG TO 1519' & PUMPED 160 SX CMT. CMT CIRCULATED TO SURFACE. PULLED TBG & TOPPED OFF WITH 15 SX CMT. TIED ONTO BACKSIDE. PRESSURED RIGHT UP TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
4395	4399		
4387	4391		

INVOICED

DATE 09/16/08
INV. NO. 2009060382

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 29 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

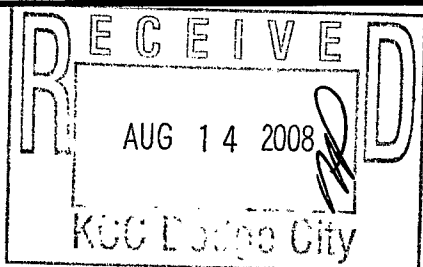

Signed Michael J. Maier
(TECHNICIAN)