

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-065-22,169-
00-00

LEASE NAME DES MARTEAU

WELL NUMBER 1-11

SPOT LOCATION NE SW SW

SEC. 11 TWP. 10S SRGE. 22W (XXX) (W)

COUNTY Graham

Date Well Completed 4-14-85

Plugging Commenced 4-14-85

Plugging Completed 4-14-85

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Pittman & Associates, Inc.
ADDRESS 5921 S. Middlefield Road, Suite 200
Littleton, CO 80123

PHONE # (303) 796-6914 OPERATORS LICENSE NO. 4036

Character of Well Dry
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? Hays

Is ACO-1 filed? yes If not, is well log attached? RECEIVED
STATE CORPORATION COMMISSION

Producing formation _____ Depth to top _____ bottom APR 17 1985 3940

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS _____ CASING RECORD _____
Wichita, Kansas

Formation	Content	From	To	Size	Put in	Pulled out
Surface	Shale	0	260	8-5/8"	258	none
cemented	with 170 sx 60/40 pos 2% gel 1.3% cc,				plug down at 5:45 p.m.	
by Sun;	cement did circ (4-8-85)					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from _____ feet to _____ feet each set.

Plugged as follows:

10 sx in rat hole; 20 sx @ 1810'; 100 sx @ 970'; 40 sx @ 305'; 10 sx @ 40' w/solid bridge plug, 50/50 poz, 6% gel, 3% cc, By Sun plug down 1:45 a.m. 4-14-85.


(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor J. W. Drilling Co., Inc. License No. 5137
Address 200 E. First, Suite 500
Wichita, KS 67202

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

JON T. WILLIAMS, JR. (employee of operator) or
(operator) of above-described well, being first duly sworn on oath, says: That
I have knowledge of the facts, statements, and matters herein contained and
the log of the above-described well as filed that the same are true and
correct, so help me God.

(Signature) [Signature]
(Address) 200 E. First, Suite 500
Wichita, KS 67202



SUBSCRIBED AND SWORN TO before me this 14 day of April, 19 85

Gerri M. Stewart
Notary Public

My Commission expires: 1-14-89

15-065-22169-00-00

DRILLERS LOG

OPERATOR: Pittman & Associates, Inc.
5921 S. Middlefield Road, Suite 200
Littleton, CO 80123

LEASE: Des Marteau No. 1-11
NE SW SW of Section 11-10S-22W
Graham County, Kansas

CONTRACTOR: J. W. Drilling Co., Inc.
200 East First, Suite 500
Wichita, Kansas 67202

COMMENCED: 4-8-85

COMPLETED: 4-14-85

RTD: 3940'

SURFACE CASING: 8-5/8" set at 258'

PRODUCTION CASING: None

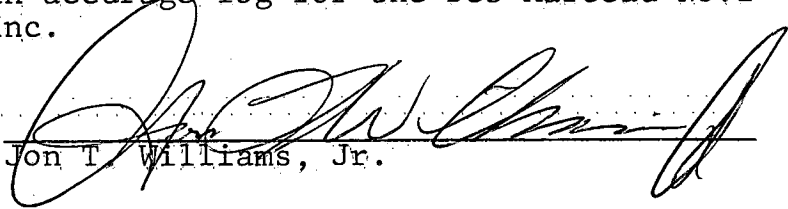
Shale.....	0	-	900
Shale & Sand...	900	-	1545
Shale.....	1545	-	1600
Red Bed&Shale..	1600	-	1811
Anhydrite.....	1811	-	1842
Shale.....	1842	-	2520
Shale & lime...	2520	-	3385
Lime.....	3385	-	3940

RECEIVED
STATE CORPORATION COMMISSION


APR 17 1985
04-17-1985
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS
COUNTY OF SEDGWICK

I, Jon T. Williams, Jr., of the J. W. Drilling Co., Inc.
hereby state the above is an accurate log for the Des Marteau No.1
for Pittman & Associates, Inc.


Jon T. Williams, Jr.

Subscribed and sworn to me this
14th day of April, 1985.


Gerri M. Stewart, Notary Public

My Commission Expires January 14, 1989.

