

15-065-00275-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 16 Twp. 10S Rge. 22W (XXXXXXXXXX)

Location as "NE/CNW 1/4 SW 1/4" or footage from lines SE/4 SE/4 NW/4
Lease Owner Fred Drilling Co., et al
Lease Name LASLEY Well No. 1
Office Address 509 Orpheum Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 6-26-19 51
Application for plugging filed 6-26-19 51
Application for plugging approved 6-26-19 51
Plugging commenced 6-26-19 51
Plugging completed 6-26-19 51
Reason for abandonment of well or producing formation

NORTH



Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rivas, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4045 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
none				8-5/8"	133'	none
				cemented w/140 sacks cement and sack (1) Cal. Chloride		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled w/heavy mud and plug set @ 130' w/15 sacks cement;
top plug set @ 40' w/10 sacks cement. Pipe cut off 3' below level of ground.

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to Fred Drilling Co.
Address 509 Orpheum Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Robert F. Walters (employee of owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. FRED DRILLING CO.

(Signature) By: Robert F. Walters
509 Orpheum Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 1951

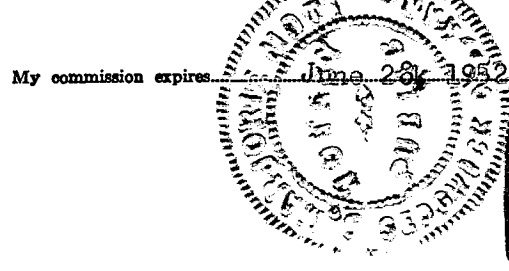

D. Margaret Mott
RECEIVED
STATE CORPORATION COMMISSION
Notary Public.

28-5091-s 8-50-10M

PLUGGING

FILE SEC 16 T 10 R 25

BOOK PAGE 91 LINE 25

JUL - 3 1951

Wichita, Kansas

15-065-00275-00-00

LACLEY WELL # 1

Location: C. SE/4 SE/4 NW/4 Sec. 16-109-22W Date Spudded: 6-15-51
 Graham County, Kansas Date Rotary Completion: 6-26-51

Operator: Fred Drilling Co. Total Depth: 4045'

Contractor: Fred Drilling Co. Elevation: 2329' LF; 2331' KB

Surface Casing: 6 jts. (137') 8-5/8" cemented
 at 133' w/140 sacks, and 1
 sack Cal. Chloride.

Oil String: None run - Plugged and abandoned
 6-26-51

T O P S (KB)

Anhydrite	1855' (+ 476)
Heebner	3569' (-1238)
Lansing-K.C.	3608' (-1277)
Base of K.C.	3839' (-1508)
Marathon Chert	3905' (-1574)
Conglomerate	3971' (-1640)
Arbuckle	4007' (-1676)
Rotary T.D.	4045'

L O G

(Figures indicate bottom of formation)

Shale	0 to 5
Sand shale	135
Sand shale	493
Shale and sand	1145
Sand and shale	1370
Sand	1570
Shale	1855
Anhydrite	1894
Shale and shells	2390
Shale and lime	3095
Shale	3304
Lime - shale	3450
Lime	3550
Lime - shale	3700
Lime	3736
Lime - shale	4012
Shale and cherty lime	4043
Cherty lime	4045'
Total Depth	4045'

The undersigned, FRED DRILLING CO. hereby certifies that the log above set out is a true and correct log of the formations encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

FRED DRILLING CO.

BY

Robert F. Walters

Subscribed and sworn to before me this 29th day of June 1951.

D. Marjorie Matt
Notary Public

My commission expires: June 28, 1952

PLUGGING
 FILE SEC. 16-T-10-R-22W
 BOOK PAGE 91 LINE 25

07-03-1951