


15-065-00634-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

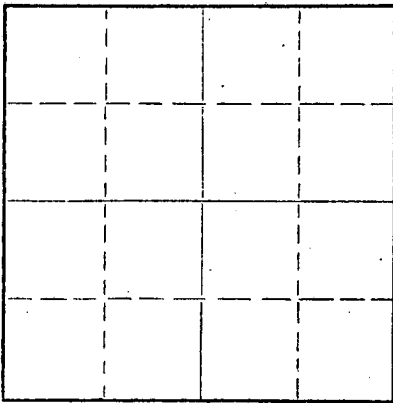

Locate well correctly on above
Section Plat

Graham County, Sec. 22 Twp. 9S Rge. 24 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C NE SW
Lease Owner Woodman & Tannitti Drilling Company
Lease Name _____ Well No. 1
Office Address Box 387, Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed _____ 1-16-19 60
Application for plugging filed _____ 1-16-19 60
Application for plugging approved _____ 1-16-19 60
Plugging commenced _____ 1-16-19 60
Plugging completed _____ 1-16-19 60
Reason for abandonment of well or producing formation Dry.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well A. D. Fabricus
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 404 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	160'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug 400 - 20 sacks
Middle Plug 150 - 20 sacks
Top Plug 40 - 10 sacks

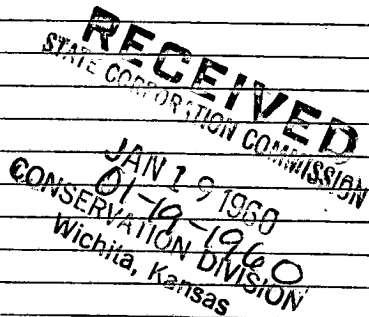

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Woodman & Tannitti Drilling Company
Address Box 387, Hoisington, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
K. T. Woodman (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) K. T. Woodman
714 Union National Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of January, 1960
Mildred E. Lick
Mildred E. Lick, Notary Public.



DRILLING LOG

Company: Woodman & Iannitti Drilling Company
Lease: #1 SUPER - Cen. NE SW Sec. 22-9S-24W
Graham County, Kansas
Contractor: Woodman & Iannitti Drilling Company
Box 387, Hoisington, Kansas
Date Commenced: 1-8-60
Date Completed: 1-16-60
Total Depth: 4040'
Casing: 8 5/8" at 160' with 130 sacks quick-set cement

Figures Indicate the Bottom of the Formation

0-100	Sand	2550	Lime
480	Shale	2790	Shale & Lime
555	Sand	2895	Lime
1125	Shale & Sand	3170	Shale & Lime
1375	Shale	3480	Lime
1450	Sand	3590	Lime & Shale
1620	Shale & Shells	3774	Lime
1859	Sand	3835	Chert Lime
2103	Shale & Shells	4040	Lime
2140	Anhydrite		
2405	Shale & Shells		

GEOLOGICAL TOPS

Elevation	2448 RB
Anhydrite	2103 345
Heebner	3767 -1319
Toronto	3791 -1343
Lansing	3813 -1365
Base/Kansas City	4030 -1582
Total Depth	4040 -1592

CONGESSON DIVISION
Wichita, Kansas

I certify the above to be a true and correct copy of the Driller's Log and the Geological Tops to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING COMPANY

By: K. T. Woodman
K. T. WOODMAN