


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

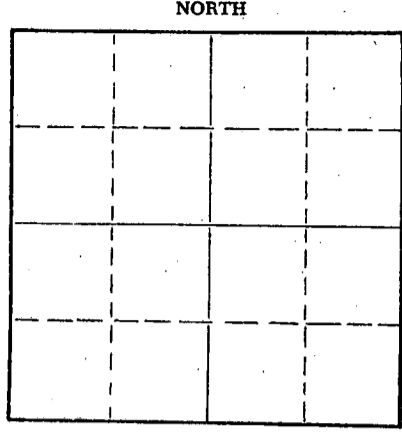

Locate well correctly on above Section Plat

Thomas County, Sec. 13 Twp. 9 Rge. 33W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SW
Lease Owner Bennett & Roberts Drilling Co.
Lease Name Franz Well No. 1
Office Address Russell, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 12/19 1954
Application for plugging filed 12/19 - verbally 1954
Application for plugging approved 12/19 - verbally 1954
Plugging commenced 12/19 1954
Plugging completed 12/19 1954
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 4810 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	313'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 300'. Pushed plug down and cemented with 1/2 sack hulls and 15 sacks cement through drill pipe. Filled hole to 40' of top. Cemented with 1/2 sack of hulls and 10 sacks cement.

NOV 27 1954

Name of Plugging Contractor
Address

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
Harold Wurst (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God, BENNETT & ROBERTS DRILLING CO.

(Signature) Harold Wurst
Russell, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of December, 1954

My commission expires 6/17/54

Harold Wurst
Notary Public.



PLUGGING
FILE SEC 13 T 9 R 33W
BOOK PAGE 17 LINE 4

Bennett & Roberts Drilling Co.
Franz #1

NW NW SW Sec. 13 Twp. 9 Rge. 33
County: Thomas, Kansas

R.T.D. 4810'

Comm: 12/2/54
Comp: 12/19/54

Tops:	
Cimarron Anhydrite	2670
Heebner Shale	4051
Toronto Lime	4067
Lansing K.C.	4090
Marmaton	4434
Cherokee	4557
Basal Penn. Sandstone	4654
Mississippi	4667

Casing Record
8 5/8" Set at 313' with 200 sacks cement

Formation:	Depth:
Surface Clay	20'
Sandy Clay	30
Shale	95
Sand	195
Blue Shale	360
Gray & White Shale	1100
Gray Shale	1230
Blue Shale	1450
Shale & Shells	1690
Pyrite, stks sandy limestone	1710
Shale & Shells	2220
Lime & Shale	2300
Shale & Shells	2485
Red Bed & Shells	2670
Anhydrite	2715
Red Bed & Shale	2850~
Shale, Shells & Red Bed	2960
Shale	3088
Shale & Shells	3100
Shale & Lime	3265
Shale	3340
Lime	3374
Lime & Shale	3522
Lime	4400
Lime, Shale streaks	4465
Lime	4495
Lime, Stks chert	4525
Lime	4673
Lime & Shale	4770
Lime	4810

STATE OF KANSAS)
RUSSELL COUNTY) SS.

I hereby certify that the above information is correct to the best of my knowledge.


BENNETT & ROBERTS DRILLING CO.

By *Quin Lake*

Subscribed and sworn to before me this 24th day of December, 1954.

Clara Lumm
Notary Public

My Commission Expires 6/17/58



12-27-1954