

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Thomas County, Sec. 22 Twp. 9 S Rge. 33 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SW SW


Lease Owner Isern Petroleum Company
Lease Name HERBAL "B" Well No. 2
Office Address Box 486, Ellinwood, Kansas 67526
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed May 28, 1977
Application for plugging filed (verbally) May 28, 1977
Application for plugging approved (verbally) May 28, 1977
Plugging commenced May 28, 1977
Plugging completed May 28, 1977

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations.

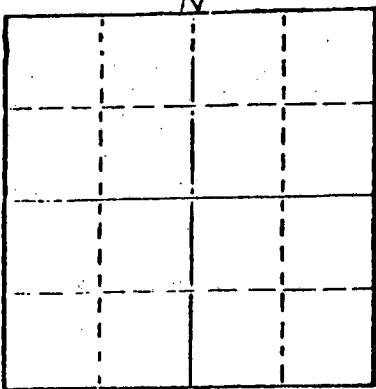

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 1st plug at 1250' with 70 sx.
2nd plug at 300' with 20 sx.
3rd plug at 40' with 10 sx.

Plug was down at 10:30 a.m. 5-28-77.

RECEIVED
STATE CORPORATION COMMISSION
JUN 15 1977
06-15-1977
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Jack L. Partridge, Ass't. Sec-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jack L. Partridge
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of June, 1977

Kathy S. Goertz
Kathy S. Goertz, Notary Public.

My commission expires



CONTRACTOR'S WELL LOG

15-193-20137-00-00

OPERATOR:
 CONTRACTOR:
 WELL NAME:
 LOCATION:
 SPUD DATE:
 COMPLETION DATE:

Isern Petroleum Company
 Abercrombie Drilling, Inc.
 HERBAL "B" #2
 C SW SW Section 22-9S-33W
 Thomas County, Kansas
 5-17-77
 5-28-77

0	260	Clay & sand
260	2690	Sand & shale
2690	2730	Anhydrite
2730	3670	Shale & lime
3670	3839	Sand & shale
3839	3965	Lime & shale
3965	4740	Lime
	4740	Rotary Total Depth

Spud hole at 12:00 a.m. 5-17-77. Drilled 370' of 12 1/4" hole. Ran 9 jts. of 8-5/8" surface casing. Set at 365.28'. Cemented with 225 sacks common cement, 2% gel, 3% CaCl. Plug was down at 7:30 p.m. 5-17-77.

T.D. 4740'. Set first plug at 1250' with 70 sacks, second plug at 300' with 20 sacks, third plug at 40' with 10 sacks. Plug was down at 10:30 a.m. 5-28-77. State plugger, Gilbert Balthazor.

SAMPLE TOPS:

Anhydrite 2690'
 B/Anhydrite 2730'

RECEIVED
 STATE CORPORATION COMMISSION

JUN 15 1977
 06-15-1977
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the HERBAL "B" #2, C SW SW Section 22-9S-33W, Thomas County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge,
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 7th day of June, 1977.

Kathy S. Goertz
 Kathy S. Goertz, Notary Public

