

18-193-20038-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Thomas County. Sec. 31 Twp. 9S Rge. 36 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE NE

Lease Owner U.S. Signal Oil Company- 1971 Program

Lease Name Penney Well No. 1

Office Address 125 Central Bldg., Midland Texas

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed 11/25 19 71

Application for plugging filed 11/25 19 71

Application for plugging approved 11/25 19 71


Plugging commenced 11/25 19 71

Plugging completed 11/25 19 71

Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

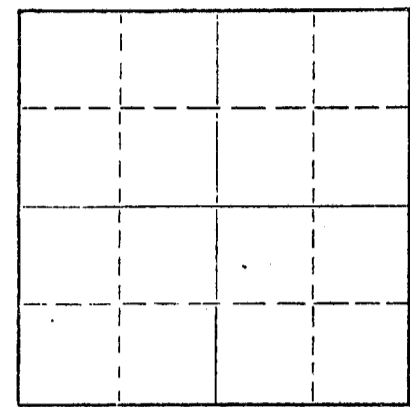

Name of Conservation Agent who supervised plugging of this well W.L. Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5679 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	454'	0-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug @ 1925' w/115 sx cement  
Plug @ 475' w/25 sx cement  
Plug @ 40' w/10 sx cement

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 6 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
12-06-1971


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Co.  
Address 1720 Wichita Plaza, Wichita, Ks.

STATE OF Kansas, COUNTY OF Sedgwick, ss. Jim Farrice

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice  
1720 Wichita Plaza, Wichita, Ks.  
(Address)



Subscribed and sworn to before me this 30th day of November, 19 71

Virginia K. Albert  
Notary Public.

15-193 - 20038 - 00 - 00

DRILLERS LOG

No. 1 Penney

CASING RECORD:

8 5/8" @ 454'  
w/275 sx cement

COMPANY: U.S. Signal Oil & Gas Co.-  
1971 Program

CONTRACTOR: RED TIGER DRILLING CO.

COMMENCED: November 4, 1971

COMPLETED: November 25, 1971

DESCRIPTION:

NE NE  
31-9S-36W  
Thomas County,  
Kansas

TOTAL DEPTH: 5679'

ELEVATION:


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sod & Shale w/sand	0	235	
Sand	235	270	
Shale	270	505	
Shale & Sand	505	1020	
Shale	1020	1145	
Sand	1145	1280	
Shale	1280	2155	
Shale w/lime	2155	2335	
D Sand	2335	2548	
Blane	2548	2564	
Shale & Red Bed	2564	2857	
Anhydrite	2857	2889	
Shale	2899	2950	
Shale & Lime	2950	3213	
Shale	3213	3510	
Shale w/lime	3510	3572	
Shale & Lime & Chert	3572	3640	
Cherty Lime	3640	3661	
Cherty Lime & Shale	3661	3720	
Lime & Shale	3720	3895	
Lime	3895	4965	
Lime Cherty	4965	5015	
Lime & Chert	5015	5070	
Cherty Lime	5070	5180	
Lime	5180	5240	
Chalky Lime & Chert	5240	5286	
Cherty Lime & Chalk	5286	5322	
Cherty Chalky Lime, Arb.	5322	5377	
Arb Lime	5377	5442	
Cherty Lime, Arb.	5442	5555	
Lime	5555	5605	
Cherty Lime	5605	5633	
Granite Wash	5633	5679	

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 6 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
12-06-1971

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

*Jim Farrice*  
Jim Farrice



Subscribed and sworn to before me this 30th day of November, 1971.

*Virginia K. Albert*  
Notary Public

My Commission Expires:  
July 23, 1974