

15-163-20447-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rooks County, Sec. 4 Twp. 10S Rge. (E) 16 (W)

Location as "NE/CNW&SW" or footage from lines C SW SE SE

Lease Owner A. L. Abercrombie, Inc.

Lease Name ZEIGLER Well No. 2

Office Address 801 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 5, 1972

Application for plugging filed (verbally) July 5, 1972

Application for plugging approved (verbally) July 5, 1972


Plugging commenced July 5, 1972

Plugging completed July 5, 1972

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

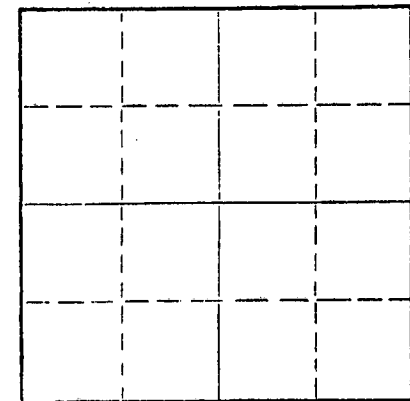

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3445 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug set at 550' w/70 sx.
2nd plug set at 240' w/20 sx.
Top plug set at 40' w/10 sx.
Job completed at 9:00 a.m. 7-5-72.

RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1972
07-14-1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

Address 801 Union Center, Wichita, Ks. 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jerry A. Langrehr (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr

801 Union Center, Wichita, Kansas 67202 (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of July, 1972

My commission expires February 10, 1975



Beverly Mann
Beverly Mann Notary Public.

CONTRACTOR'S WELL LOG

15-163-20447-00-00

OPERATOR: A. L. Abercrombie, Inc.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: ZEIGLER #2
 LOCATION: C SW SE SE, Sec. 4-10S-16W
 Rooks County, Kansas
 GEOLOGIST: Jack K. Wharton
 SPUD DATE: June 29, 1972
 COMPLETION DATE: July 5, 1972

0	45	Rock
45	153	Sand & Clay
153	640	Shale
640	805	Sand
805	1095	Shale
1095	1129	Anhydrite
1129	1640	Shale
1640	1670	Shale & Lime
1670	2855	Lime & Shale
2855	3000	Lime
3000	3055	Lime & Shale
3055	3445	Lime
	3445	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 14 1972
 07-14-1972
 CONSERVATION DIVISION
 Wichita, Kansas

Drilled 258' of 12½" surface hole and set 8-5/8" sfs. csg. at 256' K.B. cemented w/160 sx. Sunset cement. Cement circulated. Plug was down at 5:45 p.m. 6-29-72. Dry and Abandoned

SAMPLE TOPS

ELEVATION

Anhydrite	1095 (+830)	1925 K.B.
Heebner	3026 (-1101)	1923 D.F.
Toronto	3046 (-1121)	1917 G.L.
Lansing	3068 (-1143)	
B/K.C.	3314 (-1389)	
Arbuckle	3403 (-1478)	
RTD	3445 (-1520)	

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the ZEIGLER #2, C SW SE SE, Section 4-10S-16W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

By: *Jerry A. Langrehr*

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 10th day of July, 1972.

Beverly Mann
 Beverly Mann, Notary Public

My Commission Expires:
 February 10, 1975