

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-163-22,932-00-00

*Sent to Dist 10-2-87*

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE NAME Russ

WELL NUMBER 1

1650 Ft. from S Section Line

1650 Ft. from E Section Line

SEC. 7 TWP. 10S RGE. 16 ~~XXXX~~ (W)

COUNTY Rooks

Date Well Completed 7-3-87

Plugging Commenced 7-3-87

Plugging Completed 7-4-87

LEASE OPERATOR Black Petroleum Company

ADDRESS 527 Union Center Bldg., Wichita, ks 67202

PHONE# (316) -264-9342 OPERATORS LICENSE NO. 5068

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC District Office prior to plugging this well? Yes

Which KCC Office did you notify? District #6

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 3540'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	265'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 3540'-3460'  
25 sks cement @ 3460' 40 sks cement @ 270'  
25 sks cement @ 1200' 10 sks cement @ 40'  
100 sks cement @ 700' 10 sk in rathole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) [Signature]  
Kyle B. Branum

(Address) P.O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 14th day of July, 1987

Glenda R. Tiffin Notary Public

Expires: February 6, 1988



07-15-1987  
JUL 15 1987  
CP-4  
Revised 07-86  
CONSERVATION DIVISION  
Wichita, Kansas

15-163-22-932-00-00

EMPHASIS OIL OPERATIONS

P. O. BOX 506  
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Black Petroleum Company  
527 Union Center Bldg.  
Wichita, Kansas 67202

CONTRACTOR: Emphasis Oil Operations  
Box 506  
Russell, KS 67665

LEASE: Russ WELL #1

LOCATION: SE NW SE  
Section 7-10S-16W  
Rooks County, Kansas

LOGGERS TOTAL DEPTH: 3539'

ROTARY TOTAL DEPTH: 3540'

COMMENCED: 6/26/87

CASING: 8-5/8" @ 265' w/145 sks cement

ELEVATION: 1977' K.B.

COMPLETED: 7/4/87

STATUS: Dry Hole


DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil & Sand	38'	Shale	1828'
Clay & Shale	270'	Shale & Lime	2120'
Shale	505'	Shale & Lime	3220'
Shale & Sand	1172'	Lime (R.T.D.)	3540'
Anhydrite	1206'		


STATE OF KANSAS )  
                          ) ss  
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

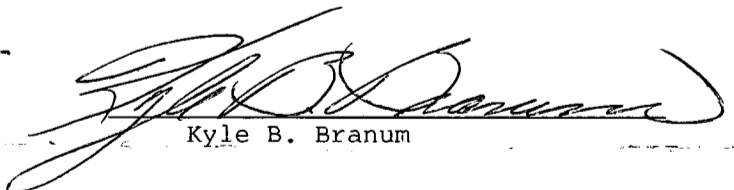  
Kyle B. Branum

~~Subscribed and sworn to before me on July 14, 1987:~~

My commission expires: February 6, 1988.

  
Glenda R. Tiffin, Notary Public



RECEIVED  
STATE CORPORATION COMMISSION

JUL 15 1987  
07-15-1987  
CONSERVATION DIVISION  
Wichita, Kansas