

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-163-01048-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County, Sec. 12 Twp. 10S Rge. (E) 16 (W)

NORTH

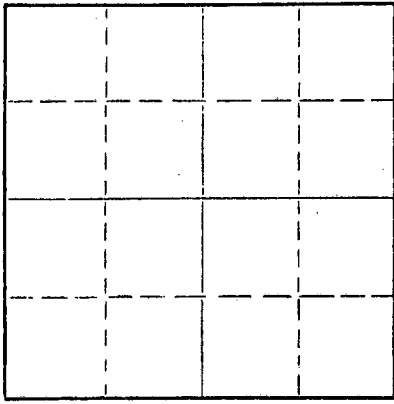

Locate well correctly on above
Section Plat

Location as "NE/CNWxSWx" or footage from lines C SE SE
Lease Owner Sunray Mid-Continent Oil Company
Lease Name Chrisler Well No. 1
Office Address P. O. Box 729, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 7, 1962
Application for plugging filed March 1962
Application for plugging approved March 1962
Plugging commenced March 7 1962
Plugging completed March 7 1962
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes - by telephone

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3539 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	271'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cement plugs, consisting of Pozmix cement, were placed at:

Plug #1, 35 sacks, placed at 300'.
Plug #2, 15 sacks, placed at 40'.

All interval between plugs is filled with 10.0# mud laden fluid.



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Company
Address Duncan, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
C. C. Shreve (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. C. Shreve
C. C. Shreve, District Manager
P. O. Box 729, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22nd. day of March, 19 62



Commission expires February 7, 1966

Emogene Atkins
Notary Public.

612-28

15-163-01048-00-00

Sunray Mid-Continent Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
March 13, 1962

Contractor: Stickle Drilling Company
Date Commenced: February 26, 1962
Date Completed: March 7, 1962

Delmar Chrisler, Well No. 1
Ctr. SE SE Section 12-10S-16W
Rooks County, Kansas

DRILLER'S LOG

Depth Figures Indicate Base of Formation:

Sand and clay	60
Sand and shale	105
Red bed	272
Shale	495
Sand	540
Lime	970
Sand and shale	1215
Shale	1339
Anhydrite	1379
Shale	1455
Shale and shells	1700
Lime and shale	1880
Shale and lime	2040
Lime	2205
Lime and shale	2325
Shale and lime	2815
Lime and shale	2885
Lime	3470
Chert and lime	3539 TD

RECEIVED
 STATE COMMISSION
 MAR 23 1962
 03-23-1962
 CONSERVATION DIVISION
 Wichita, Kansas

I, Fred E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray Mid-Continent Oil Company's Delmar Chrisler, Well No. 1, Center SE/4 SE/4 of Section 12-10S-16W., Rooks County, Kansas.

Fred E. Stickle
FRED E. STICKLE

Edith A. Lawrence
Notary Public

My Commission expires March 24, 1964.

