

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-21985-00-00
Spot: NWNWNW Sec/Twnshp/Rge: 20-22S-33W
330 feet from N Section Line, 330 feet from W Section Line
Lease Name: GARDEN CITY Well #: 7-20
County: FINNEY Total Vertical Depth: 4950 feet

Operator License No.: 32825
Op Name: PIONEER EXPLORATION, LLC
Address: 15603 KUYKENDAHL STE 200
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF		335		

160-88

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/23/2008 2:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: JASON BARRIGER Company: WARREN DRILLING Phone: _____

Proposed Plugging Method: 1ST PLUG AT 4900' WITH 50 SX RED DYED CMT. 2ND PLUG AT 2400' WITH 50 SX CMT. 3RD PLUG AT 1160' WITH 80 SX CMT. 4TH PLUG AT 600' WITH 40 SX CMT. 5TH PLUG AT 360' WITH 50 SX CMT. 6TH PLUG AT 60' WITH 20 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/23/2008 7:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

Perfs:

1ST PLUG AT 4900' WITH 50 SX RED DYED CMT. 2ND PLUG 5' PIECE OF 4 1/2" CASING ON TOP OF CMT PLUG AFTER ALLOWING CMT TO SET UP FOR 2 1/2 HOURS. 3RD PLUG AT 2400' WITH 50 SX CMT. 4TH PLUG AT 1160' WITH 80 SX CMT. 5TH PLUG AT 600' WITH 40 SX CMT. 6TH PLUG AT 360' WITH 50 SX CMT. 7TH PLUG AT 60' WITH 20 SX RED DYED CMT. 8TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


INVOICED
DATE 7-15-08
INV. NO. 2009060097

RECEIVED
KANSAS CORPORATION COMMISSION
JUL 03 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: I.P.S CALIPER ARM THAT HOLDS THE RADIATION SOURCE FOR THE GAMMA RAY DENSITY TOOL LEFT IN HOLE. USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: DP

District: 01

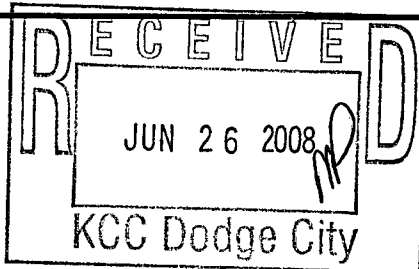

Signed

Ken Jehlik

(TECHNICIAN)