

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

KCC PPT  
Per GPS  
2113

API Well Number: 15-145-09518-00-00

Spot: NWSW

Sec/Twnshp/Rge: 14-22S-15W

1980 feet from S Section Line,

660 feet from W Section Line

Lease Name: BARSTOW

4710 Well #: 1

County: PAWNEE

Total Vertical Depth: 4010 feet

Operator License No.: 32278

Op Name: TENGASCO, INC.

Address: 1327 NOOSE RD PO BOX 458  
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3968	0	WITH 100 SX CMT
SURF	8.625	225		WITH 180 SX CMT

130.33

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 06/17/2008 10:30 AM

Plug Co. License No.: 99977

Plug Co. Name: QUALITY OIL WELL CEMENTING

Proposal Rcvd. from: GARY WAGNER

Company: TENGASCO

Phone: (785) 625-6374

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: RICHARD LACEY

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 06/18/2008 8:40 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

**\*\*LEFT 3 JOINTS TBG & RODS IN BOTTOM\*\*** RAN TBG TO 3450'. PUMPED 150# HULLS & 40 SX CMT. PULLED TBG TO 930'. PERFORATED AT 930'. PUMPED 310 SX CMT DOWN TBG. CIRCULATED CMT UP 5 1/2" CASING. GOOD CIRCULATION UP 8 5/8" X 5 1/2" ANNULUS BUT NO CMT TO SURFACE. SDON. 6/18/08: FILLED 5 1/2" CASING WITH 15 SX CMT. PUMPED 100 SX CMT DOWN 8 5/8" X 5 1/2" ANNULUS. MAXIMUM PRESSURE 200#. SHUT IN PRESSURE 100#.

Perfs:

Top	Bot	Thru	Comments
3675	3678		
3652	3655		
3631	3634		

**INVOICED**

DATE 7-15-08

INV. NO. 2009060104

RECEIVED  
KANSAS CORPORATION COMMISSION


**JUL 03 2008**

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

CONSERVATION DIVISION  
WICHITA, KS

Plugged through: TBG

District: 01

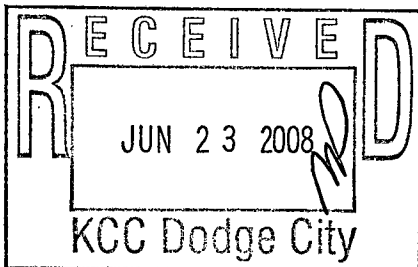

Signed

Richard M. Lacey

(TECHNICIAN)

PKS  
OO