

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24812-00-00
Spot: NENWSW Sec/Twnshp/Rge: 31-20S-23W
2160 feet from S Section Line, 970 feet from W Section Line
Lease Name: DEER VALLEY Well #: 1
County: NESS Total Vertical Depth: 4450 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: 8100 E 22ND ST N # 700 BOX 783188
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4320		WITH 2 SX CMT
PROD 4.5		4441	2376	WITH 125 SXC MT
SURF 8.625		209		WITH 160 SX CMT

144.63

Well Type: OH DA per CP 2/3 UIC Docket No: _____ Date/Time to Plug: 06/17/2008 1:30 PM
Plug Co. License No.: 32970 Plug Co. Name: H-D OILFIELD SERVICE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE Phone: (316) 691-9500

Proposed Plugging Method: CIBP @ 4320' WITH 2 SX CMT. PLUG AT 1450' WITH 50 SX CMT. PLUG AT 750' WITH 80 SX CMT. PLUG AT 240' WITH 40 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/17/2008 4:45 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

CIBP @ 4320' & 2 SX CMT. 1ST PLUG AT 1450' & 50 SX CMT. 2ND PLUG AT 750' WITH 80 SX CMT. 3RD PLUG AT 240' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4364	4369		

INVOICED
DATE 7-15-08
INV. NO. 2009060100

RECEIVED
KANSAS CORPORATION COMMISSION
JUL 03 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.
Plugged through: CSG

District: 01

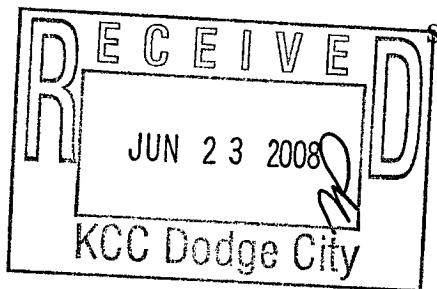

Signed Michael Maier
(TECHNICIAN)

Form CP 2/3