

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24766-00-00
Spot: NWNW NESW Sec/Twnshp/Rge: 20-16S-25W
2510 feet from S Section Line, 1340 feet from W Section Line
Lease Name: MICHAELIS-MILLER UNIT Well #: 1
County: NESS Total Vertical Depth: 4555 feet

Operator License No.: 9067
Op Name: DAMAR RESOURCES, INC.
Address: 234 W 11TH STE A PO BOX 70
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	265		WITH 165 SX CMT

148.04

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/26/2008 11:00 AM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: 1ST PLUG AT 2010' WITH 50 SX CMT. 2ND PLUG AT 1260' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 40 SX CMT. 4TH PLUG AT 300' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER WitnessType: NONE
Date/Time Plugging Completed: 06/26/2008 1:00 PM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

1ST PLUG AT 2010' WITH 50 SX CMT. 2ND PLUG AT 1260' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 40 SX CMT. 4TH PLUG AT 300' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:

INVOICED
DATE 7-24-08
INV. NO. 2009060142

RECEIVED
KANSAS CORPORATION COMMISSION


JUL 10 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

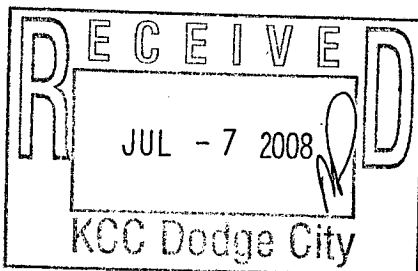

Signed _____

(TECHNICIAN)