

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20699-00-00
Spot: S2SENE Sec/Twnshp/Rge: 9-19S-33W
2280 feet from N Section Line, 680 feet from E Section Line
Lease Name: NUMRICH TRUST Well #: 1-9
County: SCOTT Total Vertical Depth: 4750 feet

Operator License No.: 5214
Op Name: LARIO OIL & GAS COMPANY
Address: 301 S MARKET ST
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	351		WITH 240 SX CMT

154.38

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/24/2008 9:00 PM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: GREG UNRUH Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: 1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1350' WITH 80 SX CMT. 3RD PLUG AT 690' WITH 50 SX CMT. 4TH PLUG AT 390' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER Witness Type: NONE
Date/Time Plugging Completed: 07/24/2008 11:00 PM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1350' WITH 80 SX CMT. 3RD PLUG AT 690' WITH 50 SX CMT. 4TH PLUG AT 390' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:

INVOICED

DATE 8-18-08
INV. NO. 2009060251

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 04 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

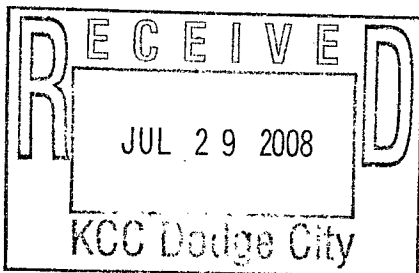

Signed

Lindley Reimer
(TECHNICIAN)

Form CP-2/3

PRT

[Signature]