

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

KCCGPS #100
SW

API Well Number: 15-187-20748-00-00

Spot: SESE

Sec/Twnshp/Rge: 21-29S-39W

346~~330~~ feet from S Section Line, ~~990~~ feet from E Section Line

Lease Name: FEDERAL LAND BANK 1027 Well #: GU 5-21

County: STANTON

Total Vertical Depth: 5840 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
DVT		2981		WITH 450 SX CMT
PROD	5.5	5840	0	WITH 430 SX CMT
SURF	8.625	1850		WITH 785 SX CMT

189.80

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 07/08/2008 8:00 AM

Plug Co. License No.: 34069

Plug Co. Name: BASIC ENERGY SERVICES, LP

Proposal Rcvd. from: STEVE RIDENOUR

Company: PRESCO WESTERN

Phone: (303) 444-8881

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 07/08/2008 8:30 PM

Witness Type: COMPLETE (100%)
KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 5600' WITH 4 SX CMT. CIBP @ 2900' WITH 4 SX CMT. PERFORATE AT 600'. ATTEMPT TO ESTABLISH INJECTION RATE AT 800 PSI. COULD NOT PUMP INTO PERFS. TIH WITH TBG TO 1893'. PLUG AT 1893' WITH 50 SX CMT. FULL CIRCULATION. 60 SX CMT AT 703' TO 0' IN 2 STAGES. FULL CIRCULATION. PUMP 72 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS. PRESSURE TO 300# & HELD.

Perfs:

Top	Bot	Thru	Comments
5670	5688		

INVOICED

DATE 8-18-08

INV. NO. 2009060257

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 04 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

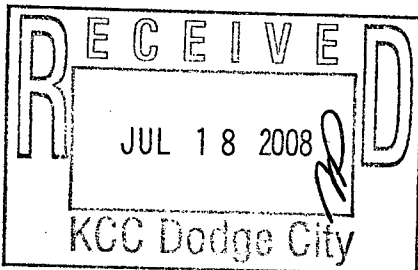

Signed

Ken Jehlik
(TECHNICIAN)

AS